

Guard Your Safety, Secure Your World.



2025 Exhibitions Information

intersec Dubai Jan 14-16th 2025	SECURITY SHOW Tokyo Mar 4-7th 2025	ISC WEST Las Vegas Mar 31st-Apr 4th 2025
SECURITY EXHIBITION + CONFERENCE SYDNEY Aug 27-29th 2025	CPSE Shenzhen Oct 28-31st 2025	

Shenzhen YCX Electronics Co., Ltd.

Add: 2nd & 6th Floor, 3rd Building, Jianghao Industrial Park, Jihua Road, Bantian, Longgang District, Shenzhen, 518000, China
Tel: (+86) 755-89392258
E-mail: ycx@ycxcctv.com
Website: www.ycxcctvcam.com

CCTV PRODUCTS CATALOGUE

2025

COMPANY OVERVIEW ▶

About Us

Shenzhen YCX Electronics Co., Ltd is one of the leading manufacturers with abundant experiences in CCTV field,owning 200 workers and a plant of 5000 square meters in Shenzhen, China. YCX is providing clients with OEM and ODM service on all kinds of CCTV camera, DVRs and NVRs. 99% of YCX products are sold to over 100 countries worldwide and are highly praised.

Our R&D

A Strong R&D department keeps developing new innovative technologies and improving excellent performance of our products. Customizing on firmware,GUI,API ,SDK etc is welcomed. YCX puts around 10% of its annual sales revenue into R&D,as a result,new models are releasing in every 3 months.

Service System

A qualified and experienced technical team ensures the best and quickest service for you.

Certificate

CE, FCC, RoHS, SGS, ISO9001

Adhering to customer-orientation, YCX provides excellent quality products and best service to create more value for customers. Let’s start cooperation and grow up together!

Environment Picture



Directory content

Dual Lens Camera/Red and Blue Flashlight Camera ●.....○	P1-P2
2MP/4MP/6MP/8MP/12MP Dual Light IP Camera ●.....○	P3-P8
5MP/8MP 1/1.8" ColorView Ultra IP Camera ●.....○	P9-P10
2MP/4MP/6MP/8MP/12MP HD IP Camera ●.....○	P11-P26
2MP/5MP/8MP Full Color 4 IN 1 HD Camera ●.....○	P27-P28
2MP/5MP/8MP 4 IN 1 HD Camera ●.....○	P29-P37
H.265 IP PTZ Camera ●.....○	P38-P40
Wireless IP Camera ●.....○	P41-P42
U Series NVR/XVR (App: Guard Live/Elink-Video Surveillance) ●.....○	P43-P45
T Series NVR/XVR (APP: SuperLive Plus) ●.....○	P46-P47
PoE Switch/Accessories ●.....○	P48

YCX CCTV Solutions

H.265 HD IP Camera	Level Range	YCX Chipset Model NO.	Resolution	Chipset	Function
	Easy	W633C	3MP	SSC373+SC2337P	Human detection
		W774	4MP	SSC377+SC4336P	Human detection
		W746F	6MP	SSC377D+GC4653	Human & Vehicle detection
		W798E	8MP	SSC378DE+GC8613	Human & Vehicle detection
		W7412	12MP	SSC378QE+OS12D40	Human & Vehicle detection
		W798EG/W798ESG	8MP	SSC378DE+GC8613	Motorized / Multifunction
		W7412G	12MP	SSC378QE+OS12D40	Motorized
	Prime	W542	2MP	SSC335+IMX307	Human detection
		W745F	5MP	SSC377D+GC4663	Human detection, WDR
		W716F	6MP	SSC377D+IMX335	Human & Vehicle detection
		W798F	8MP	SSC378QE+IMX415	Human & Vehicle detection
		W542G/W542SG	2MP	SSC335+IMX307	Motorized / Multifunction
		W716FG/W716FSG	6MP	SSC377D+IMX335	Motorized / Multifunction
		W798BG/W798BSG	8MP	SSC378DE+IMX415	Human & Vehicle detection
		W798FG/W798FSG	8MP	SSC378QE+IMX415	Motorized / Multifunction
		W775	5MP	SSC377D+SC450AI	Human & Vehicle detection, 1/1.8"
		W778	8MP	SSC378DE+SC850SL	Human & Vehicle detection, 1/1.8"
	Pro	W595B	5MP	SSC378DE+IMX335	Human & Vehicle detection, 30fps
		W728	8MP	SSC339G+IMX415	Human & Vehicle detection, 30fps
		W7312	12MP	SSC359G+IMX577	Human & Vehicle detection, 30fps
		W595BG/W595BSG	5MP	SSC378DE+IMX335	Motorized / Multifunction, 30fps
		W728G/W728SG	8MP	SSC339G+IMX415	Motorized / Multifunction, 30fps
		W7312G/W7312SG	12MP	SSC359G+IMX577	Motorized / Multifunction, 30fps
4 IN 1 HD Camera	DSP Chipset	YCX Chipset Model NO.	Resolution	Chipset	Function
	Techpoint	A822	2MP	TP3822+GC2053	Techpoint
		A828	8MP	TP3818+IMX415	Techpoint
	Fullhan	A902D	2MP	FH8536H+GC2083	Fullhan
		A852B	2MP	FH8550M+IMX307	Fullhan, WDR
		A855	5MP	FH8538E+C18	Fullhan
		A855F	5MP	FH8538E+SC501AI	Fullhan
		A955	5MP	FH8538M+IMX335	Fullhan
		A965F	5MP	FH8556H+IMX335	Fullhan, WDR
		A965FG	5MP	FH8556H+IMX335	Fullhan, Motorized WDR
		A988F	8MP	FH8556H+IMX415	Fullhan, WDR
		A988FG	8MP	FH8556H+IMX415	Fullhan, Motorized WDR
	Nextchip	A612F	2MP	NVP2441H+IMX307	Nextchip
		A612SG	2MP	NVP2441H+IMX307	Nextchip, Motorized
		A965BG	5MP	NVP2477H+IMX335	Nextchip, Motorized 5-50MM

DUAL-LENS PANORAMIC

POE Camera Series



RED&BLUE FLASHLIGHT

Dual Light POE Camera Series

Dual Lens Camera/Red and Blue Flashlight Camera



ACTIVE Deterrence



Features

2PCS Warm light + 3PCS IR LED
Light Distance: 20-30M Support P2P, ONVIF
H.264 & H.265 Metal, IP67, POE

Model	Res.	Chipset	Specification	Lens
W744ADZ58A	4MP	SSC30KQ+2*GC2063	4MP Human Body Detection 1/2.9" CMOS Sensor 20fps@3840x1080P Two way audio, Reset Button SD slot upto 256G	2* F1.6 3.6mm
W738BADZ58A	8MP	SSC359G+2*GC6603	8MP Human Body & Vehide Detection 1/2.7" CMOS Sensor 20fps@4096*1944P Two way audio, Reset Button SD slot upto 256G	2* F1.6 2.8mm



ACTIVE Deterrence



Features

2PCS Warm light + 3PCS IR LED
Light Distance: 20-30M Support P2P, ONVIF
H.264 & H.265 Metal, IP67, POE

Model	Res.	Chipset	Specification	Lens
W738BADB99GA	8MP	SSC359G+2*GC6603	8MP Human Body & Vehide Detection 1/2.7" CMOS Sensor 20fps@4096*1944P Two way audio, Reset Button SD slot upto 256G	2* F1.6 2.8mm

Red&Blue Flashlight Dual Light IP Camera



ACTIVE Deterrence



Features

2PCS IR LED&Warm Light LEDs 2PCS Red&Blue LEDs
Light Distance: 20-30M Support P2P, ONVIF
H.264 & H.265 Built in two-way audio
Metal, IP67, POE With SD slot upto 256G

Model	Res.	Chipset	Specification	Lens
W746FDRB97RA	6MP	SSC377D+GC4653	6MP Human Body & Vehide Detection 1/3" CMOS Sensor 25fps@6MP(3072*2048) 25fps@5MP(2592*1944)	F1.6 2.8mm
W716FDRB97RA	6MP	SSC377D+IMX335	6MP Human Body & Vehide Detection 1/2.8" CMOS Sensor 25fps@6MP(3072*2048) 25fps@5MP(2592*1944)	
W798EDRB97RA	8MP	SSC378DE+GC8613	8MP Human Body & Vehide Detection 1/2.7" CMOS Sensor 20fps@8MP(3840*2160)	
W798FDRB97RA	8MP	SSC378QE+IMX415	8MP Human Body & Vehide Detection 1/2.8" CMOS Sensor 20fps@8MP(3840*2160)	



ACTIVE Deterrence



Features

2PCS IR LED&Warm Light LEDs 2PCS Red&Blue LEDs
Light Distance: 20-30M Support P2P, ONVIF
H.264 & H.265 Built in two-way audio
Metal, IP67, POE With SD slot upto 256G

Model	Res.	Chipset	Specification	Lens
W716FDRZ37YA	6MP	SSC377D+IMX335	6MP Human Body & Vehide Detection 1/2.8" CMOS Sensor 25fps@6MP(3072*2048) 25fps@5MP(2592*1944)	F1.6 2.8mm
W798EDRZ37YA	8MP	SSC378DE+GC8613	8MP Human Body & Vehide Detection 1/2.7" CMOS Sensor 20fps@8MP(3840*2160)	
W798FDRZ37YA	8MP	SSC378QE+IMX415	8MP Human Body & Vehide Detection 1/2.8" CMOS Sensor 20fps@8MP(3840*2160)	

DUAL LIGHT

POE Camera Series




2MP/4MP/6MP/8MP/12MP DUAL LIGHT IP CAMERA



Features

Colorful Imaging when detect with human and vehicle at night
 2PCS Dual light LEDs (Warm and IR) Light Distance: 20-30M
 Support P2P, ONVIF H.264 & H.265
 MIC Optional Metal, IP67, POE


Model	Res.	Chipset	Specification	Lens
W542ADB93BA	2MP	SSC335+IMX307	2MP Human Body Detection Dual Light, 1/2.8" CMOS Sensor; HDR 25/30fps@1080P(1920x1080)	F1.6 2.8mm
W774ADB93BA	4MP	SSC377+SC4336P	4MP Human Body Detection Dual Light, 1/3" CMOS Sensor 25fps@4MP(2560*1440) 25/30fps@3MP(2304*1296)	
W746FADB93BA	6MP	SSC377D+GC4653	6MP Human Body & Vehicle Detection Dual Light, 1/3" CMOS Sensor 25fps@6MP(3072*2048) 25fps@5MP(2592*1944)	
W716FADB93BA	6MP	SSC377D+IMX335	6MP Human Body & Vehicle Detection Dual Light, 1/2.8" CMOS Sensor 25fps@6MP(3072*2048) 25fps@5MP(2592*1944)	
W798EADB93BA	8MP	SSC378DE+GC8613	8MP Human Body & Vehicle Detection Dual Light, 1/2.7" CMOS Sensor 20fps@8MP(3840*2160)	
W798FADB93BA	8MP	SSC378QE+IMX415	8MP Human Body & Vehicle Detection Dual Light, 1/2.8" CMOS Sensor 20fps@8MP(3840*2160)	

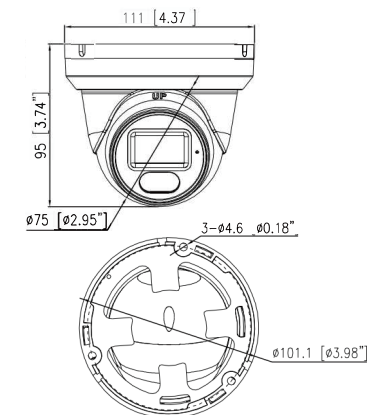

Features

Colorful Imaging when detect with human and vehicle at night
 2PCS Dual light LEDs (Warm and IR) Light Distance: 10-15M
 Support P2P, ONVIF H.264 & H.265
 Metal, IP67, POE MIC/SD Slot Optional

Model	Res.	Chipset	Specification	Lens
W595BADB63BA	5MP	SSC378DE+IMX335	5MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor 25/30fps@6MP (3072*2048) 25/30fps@5MP(2592*1944)	F1.6 2.8mm
W798EADB63BA	8MP	SSC378DE+GC8613	8MP Human Body & Vehicle Detection Dual Light, 1/2.7" CMOS Sensor 20fps@8MP(3840*2160)	

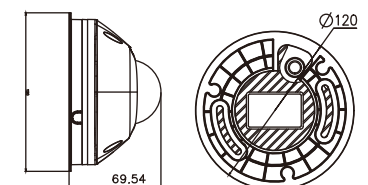




Features

Colorful Imaging when detect with human and vehicle at night
2PCS Dual light LEDs (Warm and IR) Light Distance: 20-30M
Support P2P, ONVIF H.264 & H.265
MIC Optional Metal, IP67, POE


Model	Res.	Chipset	Specification	Lens
W542ADB97A	2MP	SSC335+IMX307	2MP Human Body Detection Dual Light, 1/2.8" CMOS Sensor 25/30fps@1080P(1920x1080)	F1.6 2.8mm
W774ADB97A	4MP	SSC377+SC4336P	4 MP Human Body Detection Dual Light, 1/3" CMOS Sensor 25fps@4MP(2560*1440), 25/30fps@3MP(2304*1296)	
W746FADB97A	6MP	SSC377D+GC4653	6MP Human Body & Vehicle Detection Dual Light, 1/3" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	
W716FADB97A	6MP	SSC377D+IMX335	6MP Human Body & Vehicle Detection Dual Light, 1/2.8" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	
W798EADB97A	8MP	SSC378DE+GC8613	8MP Human Body & Vehicle Detection Dual Light, 1/2.7" CMOS Sensor 20fps@8MP(3840*2160)	
W798FADB97A	8MP	SSC378QE+IMX415	8MP Human Body & Vehicle Detection Dual Light, 1/2.8" CMOS Sensor 20fps@8MP(3840*2160)	
W728ADB97A	8MP 30FPS	SSC339G+IMX415	8MP Realtime Human Body & Vehide Detection Dual Light, 1/2.8" CMOS Sensor 25/30fps@8MP(3840*2160)	
W7412ADB97A	12MP	SSC378QE+OS12D40	12MP Human Body & Vehicle Detection Dual Light, 1/2.49" CMOS Sensor 15fps@12MP(3840*3104)	

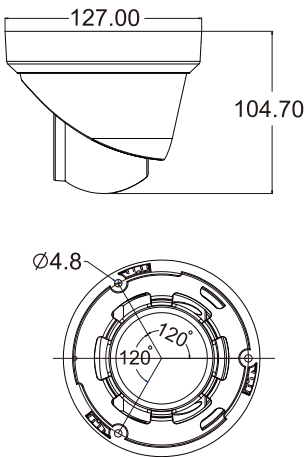

Features

Colorful Imaging when detect with human and vehicle at night
2PCS Dual light LEDs (Warm and IR) Light Distance: 20-30M
Support P2P, ONVIF H.264 & H.265
MIC/SD Slot Optional Metal, IP67, POE


Model	Res.	Chipset	Specification	Lens
W542ADZ49EA	2MP	SSC335+IMX307	2MP Human Body Detection Dual Light, 1/2.8" CMOS Sensor 25/30fps@1080P(1920x1080)	F1.6 2.8mm
W774ADZ49EA	4MP	SSC377+SC4336P	4 MP Human Body Detection Dual Light, 1/3" CMOS Sensor 25fps@4MP(2560*1440), 25/30fps@3MP(2304*1296)	
W746FADZ49EA	6MP	SSC377D+GC4653	6MP Human Body & Vehicle Detection Dual Light, 1/3" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	
W716FADZ49EA	6MP	SSC377D+IMX335	6MP Human Body & Vehicle Detection Dual Light, 1/2.8" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	
W798EADZ49EA	8MP	SSC378DE+GC8613	8MP Human Body & Vehicle Detection Dual Light, 1/2.7" CMOS Sensor 20fps@8MP(3840*2160)	
W798FADZ49EA	8MP	SSC378QE+IMX415	8MP Human Body & Vehicle Detection Dual Light, 1/2.8" CMOS Sensor 20fps@8MP(3840*2160)	
W7412ADZ49EA	12MP	SSC378QE+OS12D40	12MP Human Body & Vehide Detection Dual Light, 1/2.49" CMOS Sensor 15fps@12MP(3840*3104)	

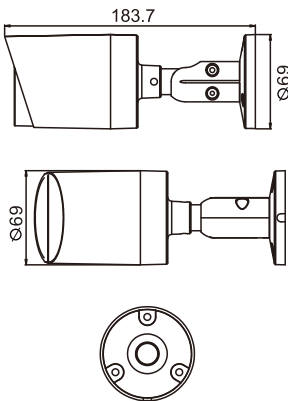

Features

Colorful Imaging when detect with human and vehicle at night
2PCS Dual light LEDs (Warm and IR) Light Distance: 20-30M
Built in two-way audio With SD slot upto 256G
Support P2P, ONVIF H.264 & H.265
Metal, IP67, POE Reset button


Model	Res.	Chipset	Specification	Lens
W542ADB97KA	2MP	SSC335+IMX307	2MP Human Body Detection Dual Light, 1/2.8" CMOS Sensor 25/30fps@1080P(1920x1080)	F1.6 2.8mm
W746FADB97KA	6MP	SSC377D+GC4653	6MP Human Body & Vehicle Detection Dual Light, 1/3" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	
W716FADB97KA	6MP	SSC377D+IMX335	6MP Human Body & Vehicle Detection Dual Light, 1/2.8" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	
W798EADB97KA	8MP	SSC378DE+GC8613	8MP Human Body & Vehicle Detection Dual Light, 1/2.7" CMOS Sensor 20fps@8MP(3840*2160)	
W798FADB97KA	8MP	SSC378QE+IMX415	8MP Human Body & Vehicle Detection Dual Light, 1/2.8" CMOS Sensor 20fps@8MP(3840*2160)	
W728ADB97KA	8MP 30FPS	SSC339G+IMX415	8MP Realtime Human Body & Vehide Detection Dual Light, 1/2.8" CMOS Sensor 25/30fps@8MP(3840*2160)	

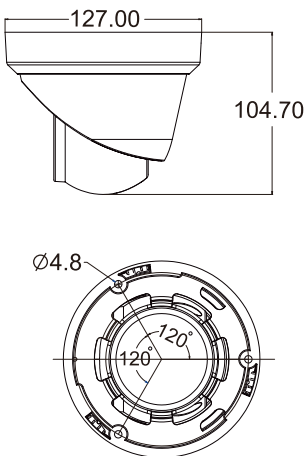

Features

Colorful Imaging when detect with human and vehicle at night
2PCS Dual light LEDs (Warm and IR) Light Distance: 20-30M
Support P2P, ONVIF H.264 & H.265
Built in two-way audio With SD slot upto 256G
Metal, IP67, POE

Model	Res.	Chipset	Specification	Lens
W542ADZ37YA	2MP	SSC335+IMX307	2MP Human Body Detection Dual Light, 1/2.8" CMOS Sensor 25/30fps@1080P(1920x1080)	F1.6 2.8mm
W746FADZ37YA	6MP	SSC377D+GC4653	6MP Human Body & Vehide Detection Dual Light, 1/3" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	
W716FADZ37YA	6MP	SSC377D+IMX335	6MP Human Body & Vehide Detection Dual Light, 1/2.8" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	
W798EADZ37YA	8MP	SSC378DE+GC8613	8MP Human Body & Vehicle Detection Dual Light, 1/2.7" CMOS Sensor 20fps@8MP(3840*2160)	
W798FADZ37YA	8MP	SSC378QE+IMX415	8MP Human Body & Vehide Detection Dual Light, 1/2.8" CMOS Sensor 20fps@8MP(3840*2160)	
W7412ADZ37YA	12MP	SSC378QE+OS12D40	12MP Human Body & Vehicle Detection Dual Light, 1/2.49" CMOS Sensor 15fps@12MP(3840*3104)	

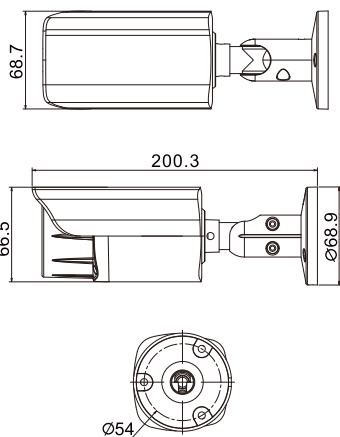




Model	Res.	Chipset	Specification	Lens
W746FGADZ56FA	6MP	SSC377D+GC4653	6MP Human Body & Vehide Detection Dual Light, 1/3" CMOS Sensor 25fps@6MP(3072*2048) 25fps@5MP(2592*1944)	2.7-13.5mm Motorized
W716FGADZ56FA	6MP	SSC377D+IMX335	6MP Human Body & Vehide Detection Dual Light, 1/2.8" CMOS Sensor 25fps@6MP(3072*2048) 25fps@5MP(2592*1944)	
W798FGADZ56FA	8MP	SSC378QE+IMX415	8MP Human Body & Vehide Detection Dual Light, 1/2.8" CMOS Sensor 20fps@8MP(3840*2160)	
W7412GADZ56FA	12MP	SSC378QE+OS12D40	12MP Human Body & Vehide Detection Dual Light, 1/2.49" CMOS Sensor 15fps@12MP(3840*3104)	



Features

Colorful Imaging when detect with human and vehicle at night
4PCS Dual light LEDs (Warm and IR) Light Distance: 30-40M
Support P2P, ONVIF H.264 & H.265
MIC/SD Slot Optional Metal, IP67, POE

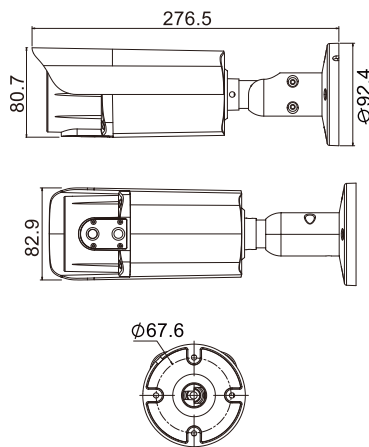


Model	Res.	Chipset	Specification	Lens
W746FGADZ57FA	6MP	SSC377D+GC4653	6MP Human Body & Vehide Detection Dual Light, 1/3" CMOS Sensor 25fps@6MP(3072*2048) 25fps@5MP(2592*1944)	2.7-13.5mm Motorized
W716FGADZ57FA	6MP	SSC377D+IMX335	6MP Human Body & Vehide Detection Dual Light, 1/2.8" CMOS Sensor 25fps@6MP(3072*2048) 25fps@5MP(2592*1944)	
W798FGADZ57FA	8MP	SSC378QE+IMX415	8MP Human Body & Vehide Detection Dual Light, 1/2.8" CMOS Sensor 20fps@8MP(3840*2160)	
W7412GADZ57FA	12MP	SSC378QE+OS12D40	12MP Human Body & Vehide Detection Dual Light, 1/2.49" CMOS Sensor 15fps@12MP(3840*3104)	



Features

Colorful Imaging when detect with human and vehicle at night
4PCS Dual light LEDs (Warm and IR) Light Distance: 30-40M
Support P2P, ONVIF H.264 & H.265
MIC/SD Slot Optional Metal, IP67, POE

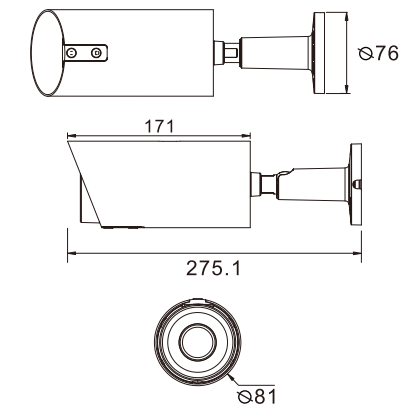


ACTIVE Deterrence

Model	Res.	Chipset	Specification	Lens
W542GADB99FA	2MP	SSC335+IMX307	2MP Human Body Detection Dual Light, 1/2.8" CMOS Sensor; HDR 25/30fps@1080P(1920x1080)	2.7-13.5mm Motorized
W746FGADB99FA	6MP	SSC377D+GC4653	6MP Human Body & Vehide Detection Dual Light, 1/3" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	
W716FGADB99FA	6MP	SSC377D+IMX335	6MP Human Body & Vehide Detection Dual Light, 1/2.8" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	
W798FGADB99FA	8MP	SSC378QE+IMX415	8MP Human Body & Vehide Detection Dual Light, 1/2.8" CMOS Sensor 20fps@8MP(3840*2160)	
W728ADB99FA	8MP 30FPS	SSC339G+IMX415	8MP Realtime, Human Body & Vehide Detection Dual Light, 1/2.8" CMOS Sensor 25/30fps@8MP(3840*2160)	F1.6 2.8mm
W728GADB99FA				2.7-13.5mm Motorized



Features

Colorful Imaging when detect with human and vehicle at night
4PCS Dual light LEDs (Warm and IR) Light Distance: 30-40M
With SD slot upto 256G H.264 & H.265
Support P2P, ONVIF Built in two-way audio Metal, IP67, POE

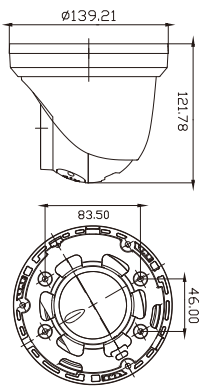

12MP 30FPS Dual Light IP CAMERA



ACTIVE Deterrence

Model	Res.	Chipset	Specification	Lens
W7312ADB99FA	12MP 30FPS	SSC359G+IMX577	12MP Realtime, Human Body & Vehide Detection Dual Light, 1/2.3" CMOS Sensor 30fps@12MP(4000x3000)	F1.6 4mm
W7312GADB99FA				3.6-10mm Motorized



Features

Colorful Imaging when detect with human and vehicle at night
4PCS Dual light LEDs (Warm and IR) Light Distance: 30-40M
With SD slot upto 256G H.264 & H.265
Support P2P, ONVIF Built in two-way audio Metal, IP67, POE



Model	Res.	Chipset	Specification	Lens
W7312ADZ56FA	12MP 30FPS	SSC359G+IMX577	12MP Realtime, Human Body & Vehide Detection Dual Light, 1/2.3" CMOS Sensor 30fps@12MP(4000x3000)	F1.6 4mm
W7312GADZ56FA				3.6-10mm Motorized



Features

Colorful Imaging when detect with human and vehicle at night
4PCS Dual light LEDs (Warm and IR) Light Distance: 30-40M
Support P2P, ONVIF H.264 & H.265
MIC/SD Slot Optional Metal, IP67, POE

1/1.8"



COLORVIEW ULTRA

POE Camera Series

5MP/8MP 1/1.8" ColorView Ultra IP CAMERA



Features

24/7 Colorful Imaging
Light Distance: 20-30M
H.264 & H.265
MIC Optional

2PCS Warm Lights
Support P2P, ONVIF
Metal, IP67, POE

Model	Res.	Chipset	Specification	Lens
W775CB97A	5MP	SSC377D+SC450AI	5MP Human Body & Vehicle Detection 1/1.8" CMOS Sensor 20@5MP(2880*1620) Colorful Imaging 24/7 0.001Lux@F1.0(AGC ON)	F1.0 2.8mm
W778CB97A	8MP	SSC378DE+SC850SL	8MP Human Body & Vehicle Detection 1/1.8" CMOS Sensor 20@8MP(3840*2160) Colorful Imaging 24/7 0.001Lux@F1.0(AGC ON)	



Features

24/7 Colorful Imaging
Light Distance: 20-30M
H.264 & H.265
MIC/SD Slot Optional

2PCS Warm Lights
Support P2P, ONVIF
Metal, IP67, POE

Model	Res.	Chipset	Specification	Lens
W775CZ49EA	5MP	SSC377D+SC450AI	5MP Human Body & Vehicle Detection 1/1.8" CMOS Sensor 20@5MP(2880*1620) Colorful Imaging 24/7 0.001Lux@F1.0(AGC ON)	F1.0 2.8mm
W778CZ49EA	8MP	SSC378DE+SC850SL	8MP Human Body & Vehicle Detection 1/1.8" CMOS Sensor 20@8MP(3840*2160) Colorful Imaging 24/7 0.001Lux@F1.0(AGC ON)	



ACTIVE Deterrence



Features

24/7 Colorful Imaging
Light Distance: 30-40M
H.264 & H.265
With Two Way Audio

4PCS Warm Lights
Support P2P, ONVIF
Metal, IP67, POE
SD Slot & Reset Button

Model	Res.	Chipset	Specification	Lens
W775CB99FA	5MP	SSC377D+SC450AI	5MP Human Body & Vehicle Detection 1/1.8" CMOS Sensor 20@5MP(2880*1620) Colorful Imaging 24/7 0.001Lux@F1.0(AGC ON)	F1.0 2.8mm
W775GCB99FA				3.6-10mm Motorized
W778CB99FA	8MP	SSC378DE+SC850SL	8MP Human Body & Vehicle Detection 1/1.8" CMOS Sensor 20@8MP(3840*2160) Colorful Imaging 24/7 0.001Lux@F1.0(AGC ON)	F1.0 2.8mm
W778GCB99FA				3.6-10mm Motorized



Features

24/7 Colorful Imaging
Light Distance: 30-40M
H.264 & H.265
MIC/SD Slot Optional

4PCS Warm Lights
Support P2P, ONVIF
Metal, IP67, POE

Model	Res.	Chipset	Specification	Lens
W775CZ57FA	5MP	SSC377D+SC450AI	5MP Human Body & Vehicle Detection 1/1.8" CMOS Sensor 20@5MP(2880*1620) Colorful Imaging 24/7 0.001Lux@F1.0(AGC ON)	F1.0 2.8mm
W775GCZ57FA				3.6-10mm Motorized
W778CZ57FA	8MP	SSC378DE+SC850SL	8MP Human Body & Vehicle Detection 1/1.8" CMOS Sensor 20@8MP(3840*2160) Colorful Imaging 24/7 0.001Lux@F1.0(AGC ON)	F1.0 2.8mm
W778GCZ57FA				3.6-10mm Motorized

IR NIGHT VISION

POE Camera Series



2MP/4MP/6MP/8MP/12MP HD IP CAMERA




Features

18PCS SMD IR LEDs
Support P2P, ONVIF
Metal, IP67, POE

IR Distance: 20-30M
H.264 & H.265
MIC Optional

Model	Res.	Chipset	Specification	Lens
W774AHZ37FA	4MP	SSC377+SC4336P	4MP Human Body Detection 1/3" CMOS Sensor 25fps@4MP(2560 x 1440), 25fps/30fps@3MP(2304 x 1296)	3.6mm
W542AHZ37FA	2MP	SSC335+IMX307	2MP Human Body Detection 1/2.8" CMOS Sensor; HDR 25/30fps@1080P(1920x1080)	
W746FAHZ37FA	6MP	SSC377D+GC4653	6MP Human Body & Vehicle Detection 1/3" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	2.8mm
W716FAHZ37FA	6MP	SSC377D+IMX335	6MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	3.6mm
W798EAHZ37FA	8MP	SSC378DE+GC8613	8MP Human Body & Vehicle Detection 1/2.7" CMOS Sensor 20fps@8MP(3840*2160)	
W798FAHZ37FA	8MP	SSC378QE+IMX415	8MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor 20fps@8MP(3840*2160)	

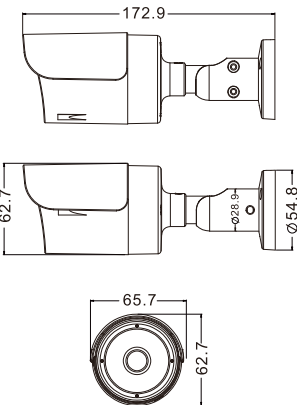


Features

18PCS SMD IR LEDs
Support P2P, ONVIF
Metal, IP67, POE

IR Distance: 20-30M
H.264 & H.265
MIC Optional

Model	Res.	Chipset	Specification	Lens
W774AHZ37EA	4MP	SSC377+SC4336P	4MP Human Body Detection 1/3" CMOS Sensor 25fps@4MP(2560 x 1440), 25fps/30fps@3MP(2304 x 1296)	3.6mm
W542AHZ37EA	2MP	SSC335+IMX307	2MP Human Body Detection 1/2.8" CMOS Sensor; HDR 25/30fps@1080P(1920x1080)	
W746FAHZ37EA	6MP	SSC377D+GC4653	6MP Human Body & Vehicle Detection 1/3" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	2.8mm
W716FAHZ37EA	6MP	SSC377D+IMX335	6MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	3.6mm
W798EAHZ37EA	8MP	SSC378DE+GC8613	8MP Human Body & Vehicle Detection 1/2.7" CMOS Sensor 20fps@8MP(3840*2160)	
W798FAHZ37EA	8MP	SSC378QE+IMX415	8MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor 20fps@8MP(3840*2160)	
W7412AHZ37EA	12MP	SSC378QE+OS12D40	12MP Human Body & Vehicle Detection 1/2.49" CMOS Sensor 15fps@12MP(3840*3104)	

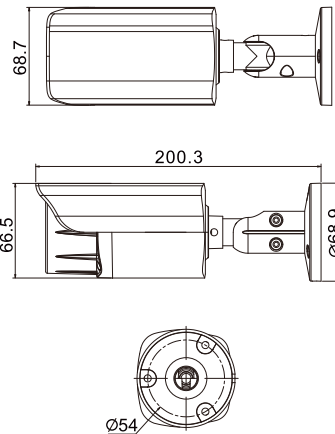




Features

- 2PCS Array IR LEDs
Support P2P, ONVIF
Metal, IP67, POE
- IR Distance: 20-30M
H.264 & H.265
MIC / SD Slot Optional


Model	Res.	Chipset	Specification	Lens
W774AHZ49EA	4MP	SSC377+SC4336P	4MP Human Body Detection 1/3" CMOS Sensor 25fps@4MP(2560 x 1440), 25fps/30fps@3MP(2304 x1296)	3.6mm
W542AHZ49EA	2MP	SSC335+IMX307	2MP Human Body Detection 1/2.8" CMOS Sensor; HDR 25/30fps@1080P(1920x1080)	
W746FAHZ49EA	6MP	SSC377D+GC4653	6MP Human Body & Vehicle Detection 1/3" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	2.8mm
W716FAHZ49EA	6MP	SSC377D+IMX335	6MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	3.6mm
W798EAHZ49EA	8MP	SSC378DE+GC8613	8MP Human Body & Vehicle Detection 1/2.7" CMOS Sensor 20fps@8MP(3840*2160)	
W798FAHZ49EA	8MP	SSC378QE+IMX415	8MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor 20fps@8MP(3840*2160)	
W7412AHZ49EA	12MP	SSC378QE+OS12D40	12MP Human Body & Vehicle Detection 1/2.49" CMOS Sensor 15fps@12MP(3840*3104)	

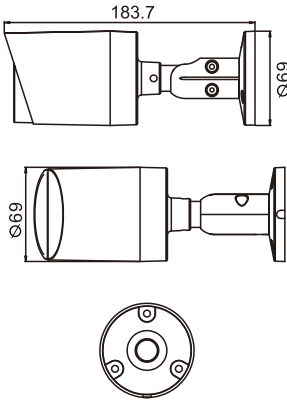

Features

- 20PCS SMD IR LEDs
Support P2P, ONVIF
Metal, IP67, POE
- IR Distance: 30-40M
H.264 & H.265
MIC / SD Slot Optional


Model	Res.	Chipset	Specification	Lens
W774AHZ57EA	4MP	SSC377+SC4336P	4MP Human Body Detection 1/3" CMOS Sensor 25fps@4MP(2560 x 1440), 25fps/30fps@3MP(2304 x1296)	2.8-12mm/VF
W542AHZ57EA	2MP	SSC335+IMX307	2MP Human Body Detection 1/2.8" CMOS Sensor; HDR 25/30fps@1080P(1920x1080)	
W746FAHZ57EA	6MP	SSC377D+GC4653	6MP Human Body & Vehicle Detection 1/3" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	
W716FAHZ57EA	6MP	SSC377D+IMX335	6MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	
W798EAHZ57EA	8MP	SSC378DE+GC8613	8MP Human Body & Vehicle Detection 1/2.7" CMOS Sensor 20fps@8MP(3840*2160)	
W798FAHZ57EA	8MP	SSC378QE+IMX415	8MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor 20fps@8MP(3840*2160)	
W7412AHZ57EA	12MP	SSC378QE+OS12D40	12MP Human Body & Vehicle Detection 1/2.49" CMOS Sensor 15fps@12MP(3840*3104)	

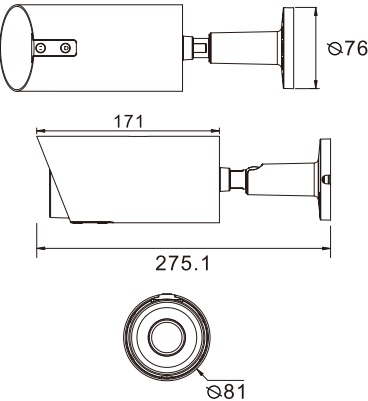

Features

- 20PCS SMD IR LEDs
Support P2P, ONVIF
Metal, IP67, POE
- IR Distance: 30-40M
H.264 & H.265
MIC Optional


Model	Res.	Chipset	Specification	Lens
W774AHZ56EA	4MP	SSC377+SC4336P	4MP Human Body Detection 1/3" CMOS Sensor 25fps@4MP(2560 x 1440), 25fps/30fps@3MP(2304 x1296)	2.8-12mm/VF
W542AHZ56EA	2MP	SSC335+IMX307	2MP Human Body Detection 1/2.8" CMOS Sensor; HDR 25/30fps@1080P(1920x1080)	
W746FAHZ56EA	6MP	SSC377D+GC4653	6MP Human Body & Vehicle Detection 1/3" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	
W716FAHZ56EA	6MP	SSC377D+IMX335	6MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	
W798EAHZ56EA	8MP	SSC378DE+GC8613	8MP Human Body & Vehicle Detection 1/2.7" CMOS Sensor 20fps@8MP(3840*2160)	
W798FAHZ56EA	8MP	SSC378QE+IMX415	8MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor 20fps@8MP(3840*2160)	
W7412AHZ56EA	12MP	SSC378QE+OS12D40	12MP Human Body & Vehicle Detection 1/2.49" CMOS Sensor 15fps@12MP(3840*3104)	

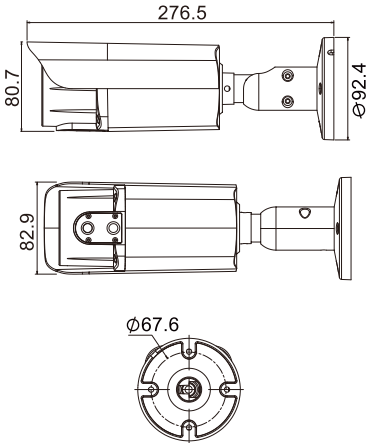

Features

- 4PCS Array IR LEDs
IR Distance: 70-80M
H.264 & H.265
- Support P2P, ONVIF
Metal, IP67, POE

Model	Res.	Chipset	Specification	Lens
W774AHZ86A	4MP	SSC377+SC4336P	4MP Human Body Detection 1/3" CMOS Sensor 25fps@4MP(2560 x 1440), 25fps/30fps@3MP(2304 x1296)	2.8-12mm/VF
W542AHZ86A	2MP	SSC335+IMX307	2MP Human Body Detection 1/2.8" CMOS Sensor; HDR 25/30fps@1080P(1920x1080)	
W746FAHZ86A	6MP	SSC377D+GC4653	6MP Human Body & Vehicle Detection 1/3" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	
W716FAHZ86A	6MP	SSC377D+IMX335	6MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	
W798EAHZ86A	8MP	SSC378DE+GC8613	8MP Human Body & Vehicle Detection 1/2.7" CMOS Sensor 20fps@8MP(3840*2160)	
W798FAHZ86A	8MP	SSC378QE+IMX415	8MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor 20fps@8MP(3840*2160)	
W7412AHZ86A	12MP	SSC378QE+OS12D40	12MP Human Body & Vehicle Detection 1/2.49" CMOS Sensor 15fps@12MP(3840*3104)	

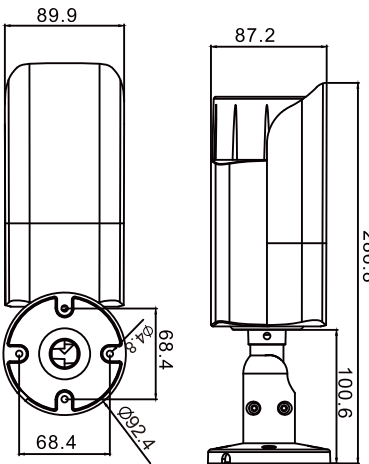




Optional



Features

2PCS Array IR LEDs IR Distance: 20~30M
Support P2P, ONVIF H.264 & H.265
Metal, IP67, POE MIC Optional

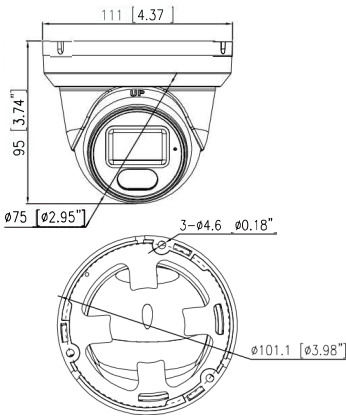


Model	Res.	Chipset	Specification	Lens
W774AHBB93BA	4MP	SSC377+SC4336P	4MP Human Body Detection 1/3" CMOS Sensor 25fps@4MP(2560 x 1440), 25fps/30fps@3MP(2304 x1296)	3.6mm
W542AHBB93BA	2MP	SSC335+IMX307	2MP Human Body Detection 1/2.8" CMOS Sensor; HDR 25/30fps@1080P(1920x1080)	
W746FAHBB93BA	6MP	SSC377D+GC4653	6MP Human Body & Vehicle Detection 1/3" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	2.8mm
W716FAHBB93BA	6MP	SSC377D+IMX335	6MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	3.6mm
W798EAHBB93BA	8MP	SSC378DE+GC8613	8MP Human Body & Vehicle Detection 1/2.7" CMOS Sensor 20fps@8MP(3840*2160)	
W798FAHBB93BA	8MP	SSC378QE+IMX415	8MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor 20fps@8MP(3840*2160)	



Features

2PCS Array IR LEDs IR Distance: 20~30M
Support P2P, ONVIF H.264 & H.265
Metal, IP67, POE MIC Optional
SD slot & Reset button

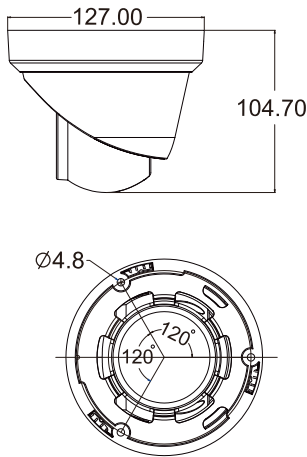


Model	Res.	Chipset	Specification	Lens
W542AHBB97SA	2MP	SSC335+IMX307	2MP Human Body Detection 1/2.8" CMOS Sensor, HDR25/30fps@1080P(1920x1080) With SD slot upto 256G	3.6mm
W746FAHBB97SA	6MP	SSC377D+GC4653	6MP Human Body & Vehicle Detection 1/3" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944) With SD slot upto 256G	2.8mm
W716FAHBB97SA	6MP	SSC377D+IMX335	6MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944) With SD slot upto 256G	3.6mm
W798EAHBB97SA	8MP	SSC378DE+GC8613	8MP Human Body & Vehicle Detection 1/2.7" CMOS Sensor, 20fps@8MP(3840*2160) With SD slot upto 256G	
W798FAHBB97SA	8MP	SSC378QE+IMX415	8MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor, 20fps@8MP(3840*2160) With SD slot upto 256G	



Features

18PCS SMD IR LEDs IR Distance: 20~30M
Support P2P, ONVIF H.264 & H.265
Metal, IP67, POE MIC Optional

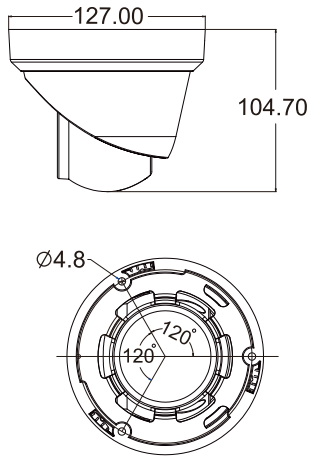


Model	Res.	Chipset	Specification	Lens
W774AHBB97A	4MP	SSC377+SC4336P	4MP Human Body Detection 1/3" CMOS Sensor 25fps@4MP(2560 x 1440), 25fps/30fps@3MP(2304 x1296)	3.6mm
W542AHBB97A	2MP	SSC335+IMX307	2MP Human Body Detection 1/2.8" CMOS Sensor; HDR 25/30fps@1080P(1920x1080)	
W746FAHBB97A	6MP	SSC377D+GC4653	6MP Human Body & Vehicle Detection 1/3" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	2.8mm
W716FAHBB97A	6MP	SSC377D+IMX335	6MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	3.6mm
W798EAHBB97A	8MP	SSC378DE+GC8613	8MP Human Body & Vehicle Detection 1/2.7" CMOS Sensor 20fps@8MP(3840*2160)	
W798FAHBB97A	8MP	SSC378QE+IMX415	8MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor 20fps@8MP(3840*2160)	
W7412AHBB97A	12MP	SSC378QE+OS12D40	12MP Human Body & Vehicle Detection 1/2.49" CMOS Sensor 15fps@12MP(3840*3104)	



Features

2PCS Array IR LEDs IR Distance: 20~30M
Support P2P, ONVIF H.264 & H.265
Metal, IP67, POE Two way audio
SD slot & Reset button

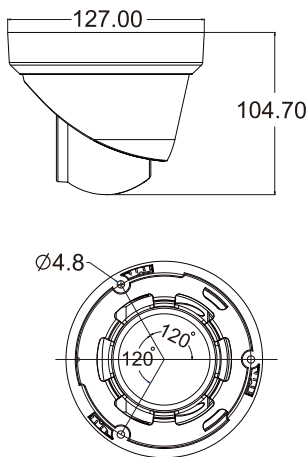


Model	Res.	Chipset	Specification	Lens
W542AHBB97KA	2MP	SSC335+IMX307	2MP Human Body Detection 1/2.8" CMOS Sensor, HDR, 25/30fps@1080P(1920x1080) With SD slot upto 256G	3.6mm
W746FAHBB97KA	6MP	SSC377D+GC4653	6MP Human Body & Vehicle Detection 1/3" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944) With SD slot upto 256G	2.8mm
W716FAHBB97KA	6MP	SSC377D+IMX335	6MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944) With SD slot upto 256G	3.6mm
W798EAHBB97KA	8MP	SSC378DE+GC8613	8MP Human Body & Vehicle Detection 1/2.7" CMOS Sensor, 20fps@8MP(3840*2160) With SD slot upto 256G	
W798FAHBB97KA	8MP	SSC378QE+IMX415	8MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor, 20fps@8MP(3840*2160) With SD slot upto 256G	



Features

18PCS SMD IR LEDs
Support P2P, ONVIF
Metal, IP67, POE
IR Distance: 20-30M
H.264 & H.265
MIC / SD slot Optional

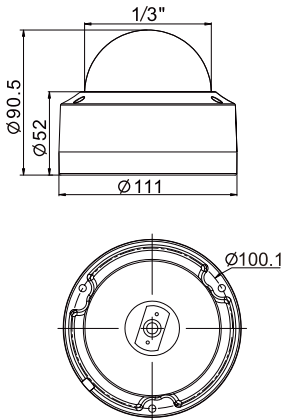


Model	Res.	Chipset	Specification	Lens
W774AHBB54A	4MP	SSC377+SC4336P	4MP Human Body Detection 1/3" CMOS Sensor 25fps@4MP(2560 x 1440), 25fps/30fps@3MP(2304 x 1296)	2.8-12mm/VF
W542AHBB54A	2MP	SSC335+IMX307	2MP Human Body Detection 1/2.8" CMOS Sensor; HDR 25/30fps@1080P(1920x1080)	
W746FAHBB54A	6MP	SSC377D+GC4653	6MP Human Body & Vehicle Detection 1/3" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	
W716FAHBB54A	6MP	SSC377D+IMX335	6MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	
W798EAHBB54A	8MP	SSC378DE+GC8613	8MP Human Body & Vehicle Detection 1/2.7" CMOS Sensor 20fps@8MP(3840*2160)	3.6mm
W798FAHBB54A	8MP	SSC378QE+IMX415	8MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor 20fps@8MP(3840*2160)	



Features

4PCS Array IR LEDs
Support P2P, ONVIF
Metal, IP67, POE
IR Distance: 30-40M
H.264 & H.265
MIC / SD Slot Optional

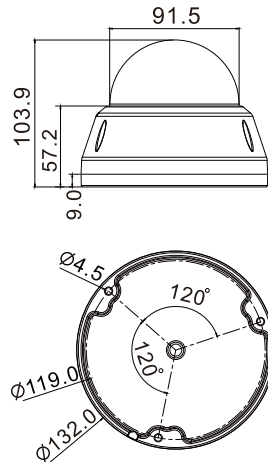


Model	Res.	Chipset	Specification	Lens
W774AHBB59A	4MP	SSC377+SC4336P	4MP Human Body Detection 1/3" CMOS Sensor 25fps@4MP(2560 x 1440), 25fps/30fps@3MP(2304 x 1296)	2.8-12mm/VF
W542AHBB59A	2MP	SSC335+IMX307	2MP Human Body Detection 1/2.8" CMOS Sensor; HDR 25/30fps@1080P(1920x1080)	
W746FAHBB59A	6MP	SSC377D+GC4653	6MP Human Body & Vehicle Detection 1/3" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	
W716FAHBB59A	6MP	SSC377D+IMX335	6MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	
W798EAHBB59A	8MP	SSC378DE+GC8613	8MP Human Body & Vehicle Detection 1/2.7" CMOS Sensor 20fps@8MP(3840*2160)	
W798FAHBB59A	8MP	SSC378QE+IMX415	8MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor 20fps@8MP(3840*2160)	



Features

2PCS IR Array LEDs
Support P2P, ONVIF
Metal, IP67, POE
IR Distance: 20-30M
H.264 & H.265
MIC Optional

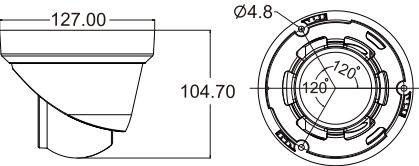

Model	Res.	Chipset	Specification	Lens
W542AHBB97WA	2MP	SSC335+IMX307	2MP Human Body Detection 1/2.8" CMOS Sensor; HDR, 25/30fps@1080P(1920x1080)	2.1mm
W716FAHBB97WA	6MP	SSC377D+IMX335	6MP Human Body & Vehicle Detection, 1/2.8" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	
W798EAHBB97WA	8MP	SSC378DE+GC8613	8MP Human Body & Vehicle Detection 1/2.7" CMOS Sensor, 20fps@8MP(3840*2160)	
W798FAHBB97WA	8MP	SSC378QE+IMX415	8MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor, 20fps@8MP(3840*2160)	



Features

4PCS Array White LEDs
Light Distance: 70-80M
H.264 & H.265
Support P2P, ONVIF
Metal, IP65, POE


Model	Res.	Chipset	Specification	Lens
W716FACHZ35A	6MP	SSC335+IMX307	6MP Human Body & Vehicle Detection, 1/2.8" CMOS Sensor 25/30fps@6MP(3072*2048), 25fps@5MP(2592*1944)	6-22mm / VF
W716FGACHZ35A				7-22mm Motorized
W595BACHZ35A	5MP 30FPS	SSC378DE+GC8613	5MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor 25/30fps@6MP(3072*2048), 25/30fps@5MP(2592*1944)	6-22mm / VF
W595BGACHZ35A				7-22mm Motorized



Features

5*12PCS IR Leds
Support P2P, ONVIF
Plastic, IP65, POE
IR Distance: 10-15m
H.264 & H.265
MIC Optional

Model	Res.	Chipset	Specification	Lens
W746FAHY06	6MP	SSC377D+GC4653	6MP Human Body & Vehicle Detection, 1/3" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	3.7mm



Features

1PCS SMD IR LED
Support P2P, ONVIF
Metal, POE on cable
IR distance: 5-8M
H.264 & H.265

Model	Res.	Chipset	Specification	Lens
W716FAHD03	6MP	SSC377D+IMX335	6MP Human Body & Vehicle Detection, 1/3" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	2.8mm




Model	Res.	Chipset	Specification	Lens
W542GAHBB54A	2MP	SSC335+IMX307	2MP Human Body Detection 1/2.8" CMOS Sensor; HDR, 25/30fps@1080P(1920x1080)	2.8-12mm Motorized
W716FGAHBB54A	6MP	SSC377D+IMX335	6MP Human Body & Vehicle Detection, 1/2.8" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	
W798EGAHBB54A	8MP	SSC378DE+GC8613	8MP Human Body & Vehicle Detection 1/2.7" CMOS Sensor, 20fps@8MP(3840*2160)	
W798FGAHBB54A	8MP	SSC378QE+IMX415	8MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor, 20fps@8MP(3840*2160)	2.8-8mm Motorized



Features

18PCS SMD IR LEDs
Support P2P, ONVIF
Metal, IP67, POE
IR Distance: 20-30M
H.264 & H.265
MIC / SD Slot Optional

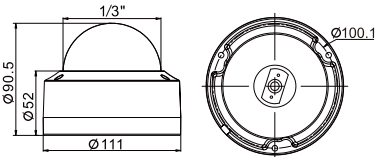


Model	Res.	Chipset	Specification	Lens
W542GAHBB59A	2MP	SSC335+IMX307	2MP Human Body Detection 1/2.8" CMOS Sensor; HDR, 25/30fps@1080P(1920x1080)	2.8-12mm Motorized
W716FGAHBB59A	6MP	SSC377D+IMX335	6MP Human Body & Vehicle Detection, 1/2.8" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	
W798EGAHBB59A	8MP	SSC378DE+GC8613	8MP Human Body & Vehicle Detection 1/2.7" CMOS Sensor, 20fps@8MP(3840*2160)	
W798FGAHBB59A	8MP	SSC378QE+IMX415	8MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor, 20fps@8MP(3840*2160)	



Features

4PCS Array IR LEDs
Support P2P, ONVIF
Metal, IP67, POE
IR Distance: 30-40M
H.264 & H.265
MIC / SD Slot Optional

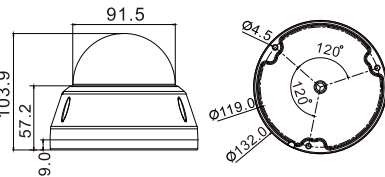


Model	Res.	Chipset	Specification	Lens
W542GAHBB78A	2MP	SSC335+IMX307	2MP Human Body Detection 1/2.8" CMOS Sensor; HDR, 25/30fps@1080P(1920x1080)	2.8-12mm Motorized
W716FGAHBB78A	6MP	SSC377D+IMX335	6MP Human Body & Vehicle Detection, 1/2.8" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	
W798EGAHBB78A	8MP	SSC378DE+GC8613	8MP Human Body & Vehicle Detection 1/2.7" CMOS Sensor, 20fps@8MP(3840*2160)	
W798FGAHBB78A	8MP	SSC378QE+IMX415	8MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor, 20fps@8MP(3840*2160)	



Features

24PCS SMD IR LEDs
Support P2P, ONVIF
Metal, IP67, POE
IR Distance: 30-40M
H.264 & H.265
MIC / SD Slot Optional


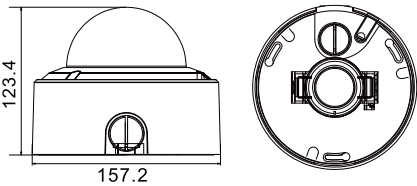


Model	Res.	Chipset	Specification	Lens
W542GAHZ56FA	2MP	SSC335+IMX307	2MP Human Body Detection 1/2.8" CMOS Sensor; HDR 25/30fps@1080P(1920x1080)	2.8-12mm Motorized
W716FGAHZ56FA	6MP	SSC377D+IMX335	6MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	
W798EGAHZ56FA	8MP	SSC378DE+GC8613	8MP Human Body & Vehicle Detection 1/2.7" CMOS Sensor 20fps@8MP(3840*2160)	
W798FGAHZ56FA	8MP	SSC378QE+IMX415	8MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor 20fps@8MP(3840*2160)	
W7412GAHZ56FA	12MP	SSC378QE+OS12D40	12MP Human Body & Vehicle Detection 1/2.49" CMOS Sensor 15fps@12MP(3840*3104)	2.7-13.5mm Motorized



Features

20PCS SMD IR LEDs
Support P2P, ONVIF
Metal, IP67, POE
IR Distance: 30-40M
H.264 & H.265
MIC / SD slot Optional

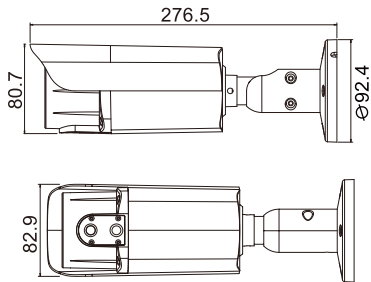


Model	Res.	Chipset	Specification	Lens
W542GAHZ57FA	2MP	SSC335+IMX307	2MP Human Body Detection 1/2.8" CMOS Sensor; HDR 25/30fps@1080P(1920x1080)	2.8-12mm Motorized
W716FGAHZ57FA	6MP	SSC377D+IMX335	6MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944)	
W798EGAHZ57FA	8MP	SSC378DE+GC8613	8MP Human Body & Vehicle Detection 1/2.7" CMOS Sensor 20fps@8MP(3840*2160)	
W798FGAHZ57FA	8MP	SSC378QE+IMX415	8MP Human Body & Vehicle Detection 1/2.8" CMOS Sensor 20fps@8MP(3840*2160)	
W7412GAHZ57FA	12MP	SSC378QE+OS12D40	12MP Human Body & Vehicle Detection 1/2.49" CMOS Sensor 15fps@12MP(3840*3104)	2.7-13.5mm Motorized




Features

20PCS SMD IR LEDs
Support P2P, ONVIF
Metal, IP67, POE
IR Distance: 30-40M
H.264 & H.265
MIC / SD Slot Optional

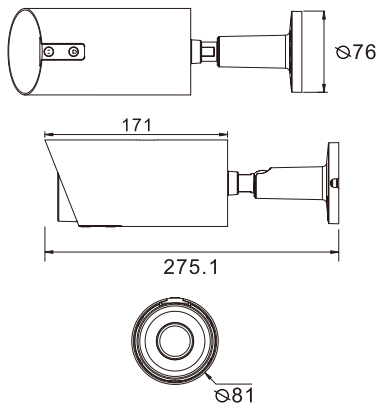





4PCS Array IR LEDs	
IR Distance: 70~80M	Support P2P, ONVIF
H.264 & H.265	Metal, IP67, POE






4PCS Array IR LEDs
IR Distance: 70~80M
H.264 & H.265




4PCS IR Array LEDs	IR Distance: 30-40M
Support P2P, ONVIF	H.264 & H.265
Metal, IP67, POE	Reset button
Built in two-way audio	With SD slot upto 256G

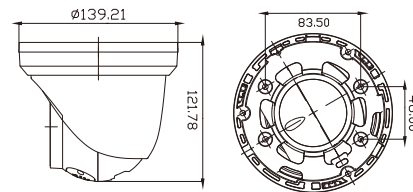

20PCS SMD IR LEDs	IR Distance: 30-40M
Support P2P, ONVIF	H.264 & H.265
Metal, IP67, POE	Reset Button
With Alarm, Audio, SD slot	



4PCS Array IR LEDs	IR Distance: 70-80M
Support P2P, ONVIF	H.264 & H.265
Metal, IP67, POE	Reset Button
With Alarm, Audio, SD slot	

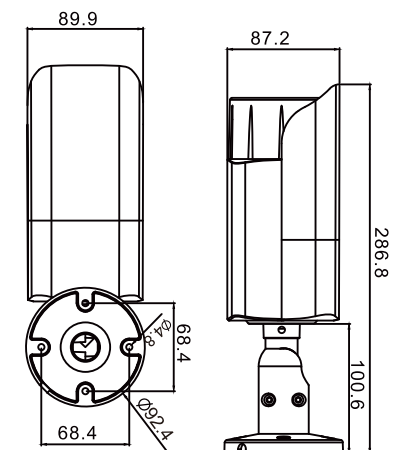




Model	Res.	Chipset	Specification	Lens
W542SAHBB59A	2MP	SSC335+IMX307	2MP Human Body Detection, 1/2.8" CMOS Sensor; HDR 25/30fps@1080P(1920x1080) With Alarm, Audio, SD Card slot	2.8-12mm/VF
W542SGAHBB59A				2.8-12mm Motorized
W716FSAHBB59A	6MP	SSC377D+IMX335	6MP Human Body & Vehicle Detection, 1/2.8" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944) With Alarm, Audio, SD Card slot	2.8-12mm/VF
W716FSGAHBB59A				2.8-12mm Motorized
W798FSAHBB59A	8MP	SSC378QE+IMX415	8MP Human Body & Vehicle Detection, 1/2.8" CMOS Sensor 20fps@8MP(3840*2160) With Alarm, Audio, SD Card slot	2.8-12mm/VF
W798FSGAHBB59A				2.8-12mm Motorized



Features

4PCS Array IR LEDs
Support P2P, ONVIF
Metal, IP67, POE
With Alarm, Audio, SD slot

IR Distance: 30~40M
H.264 & H.265
Reset Button



Model	Res.	Chipset	Specification	Lens
W595BAHZ37EA	5MP 30FPS	SSC378DE+IMX335	5MP Realtime, Human Body & Vehicle Detection 1/2.8" CMOS Sensor 25/30fps@6MP(3072*2048), 25/30fps@5MP(2592*1944)	3.6mm
W728AHZ37EA	8MP 30FPS	SSC339G+IMX415	8MP Realtime, Human Body & Vehicle Detection 1/2.8" CMOS Sensor, 25/30fps@8MP(3840*2160)	3.6mm




Model	Res.	Chipset	Specification	Lens
W595BAHZ49EA	5MP 30FPS	SSC378DE+IMX335	5MP Realtime, Human Body & Vehicle Detection 1/2.8" CMOS Sensor 25/30fps@6MP(3072*2048), 25/30fps@5MP(2592*1944)	3.6mm
W728AHZ49EA	8MP 30FPS	SSC339G+IMX415	8MP Realtime, Human Body & Vehicle Detection 1/2.8" CMOS Sensor, 25/30fps@8MP(3840*2160)	3.6mm



Features

18PCS SMD IR LEDs
Support P2P, ONVIF
Metal, IP67, POE


IR Distance: 20~30M
H.264 & H.265
MIC/SD Slot Optional



Features

2PCS Array IR LEDs
Support P2P, ONVIF
Metal, IP67, POE


IR Distance: 20~30M
H.264 & H.265
MIC/SD Slot Optional



Features

20PCS SMD IR LEDs
Support P2P, ONVIF
Metal, IP67, POE


IR Distance: 30~40M
H.264 & H.265
MIC Optional

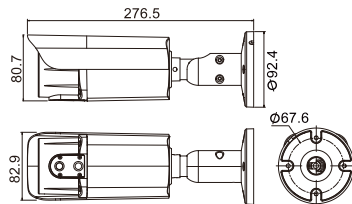

Features

4PCS Array IR LEDs
IR Distance: 70~80M
H.264 & H.265

Support P2P, ONVIF
Metal, IP67, POE




Model	Res.	Chipset	Specification	Lens
W542SAHBB78A	2MP	SSC335+IMX307	2MP Human Body Detection, 1/2.8" CMOS Sensor; HDR 25/30fps@1080P(1920x1080) With Alarm, Audio, SD Card slot	2.8-12mm/VF
W542SGAHBB78A				2.8-12mm Motorized
W716FSAHBB78A	6MP	SSC377D+IMX335	6MP Human Body & Vehicle Detection, 1/2.8" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944) With Alarm, Audio, SD Card slot	2.8-12mm/VF
W716FSGAHBB78A				2.8-12mm Motorized
W798FSAHBB78A	8MP	SSC378QE+IMX415	8MP Human Body & Vehicle Detection, 1/2.8" CMOS Sensor 20fps@8MP(3840*2160) With Alarm, Audio, SD Card slot	2.8-12mm/VF
W798FSGAHBB78A				2.8-12mm Motorized




Features

24PCS SMD IR LEDs
Support P2P, ONVIF
Metal, IP67, POE
With Alarm, Audio, SD slot

IR Distance: 30~40M
H.264 & H.265
Reset Button



Model	Res.	Chipset	Specification	Lens
W595BAHZ56EA	5MP 30FPS	SSC378DE+IMX335	5MP Realtime, Human Body & Vehicle Detection 1/2.8" CMOS Sensor 25/30fps@6MP(3072*2048), 25/30fps@5MP(2592*1944)	2.7-13.5mm/VF
W595GAHZ56FA				2.7-13.5mm Motorized
W728AHZ56EA	8MP 30FPS	SSC339G+IMX415	8MP Realtime, Human Body & Vehicle Detection 1/2.8" CMOS Sensor, 25/30fps@8MP(3840*2160)	2.7-13.5mm/VF
W728GAHZ56FA				2.7-13.5mm Motorized




Model	Res.	Chipset	Specification	Lens
W595BAHZ86A	5MP 30FPS	SSC378DE+IMX335	5MP Realtime, Human Body & Vehicle Detection 1/2.8" CMOS Sensor 25/30fps@6MP(3072*2048), 25/30fps@5MP(2592*1944)	2.7-13.5mm/VF
W595GAHZ86A				2.7-13.5mm Motorized
W728AHZ86A	8MP 30FPS	SSC339G+IMX415	8MP Realtime, Human Body & Vehicle Detection 1/2.8" CMOS Sensor, 25/30fps@8MP(3840*2160)	2.7-13.5mm/VF
W728GAHZ86A				2.7-13.5mm Motorized



Features

4PCS Array IR LEDs
IR Distance: 70~80M
H.264 & H.265

Support P2P, ONVIF
Metal, IP67, POE



Features

NO IR LED
Support P2P, ONVIF
H.264 & H.265, POE
With Alarm, Audio, SD slot
Reset Button



Model	Res.	Chipset	Specification	Lens
W542SAQ961	2MP	SSC335+IMX307	2MP Human Body Detection, 1/2.8" CMOS Sensor; HDR 25/30fps@1080P(1920x1080), With Alarm, Audio, SD Card slot	Lens Not Included
W716FSAQ961	6MP	SSC377D+IMX335	6MP Human Body & Vehicle Detection, 1/2.8" CMOS Sensor 25fps@6MP(3072*2048), 25fps@5MP(2592*1944) With Alarm, Audio, SD Card slot	
W798FSAQ961	8MP	SSC378QE+IMX415	8MP Human Body & Vehicle Detection, 1/2.8" CMOS Sensor 20fps@8MP(3840*2160), With Alarm, Audio, SD Card slot	


High-end 30FPS 5MP/8MP IP CAMERA High-end 5MP/8MP/12MP IP MULTIFUNCTION CAMERA



Model	Res.	Chipset	Specification	Lens
W595BAHBB97A	5MP 30FPS	SSC378DE+IMX335	5MP Realtime, Human Body & Vehicle Detection 1/2.8" CMOS Sensor 25/30fps@6MP(3072*2048), 25/30fps@5MP(2592*1944)	3.6mm
W728AHBB97A	8MP 30FPS	SSC339G+IMX415	8MP Realtime, Human Body & Vehicle Detection 1/2.8" CMOS Sensor, 25/30fps@8MP(3840*2160)	3.6mm




18PCS SMD IR LEDs	IR Distance: 20-30M
Support P2P, ONVIF	H.264 & H.265
Metal, IP67, POE	MIC Optional



Model	Res.	Chipset	Specification	Lens
W595BSGAHBB59A	5MP 30FPS	SSC378DE+IMX335	5MP Realtime, Human Body & Vehicle Detection, 1/2.8" CMOS Sensor 25/30fps@6MP(3072*2048), 25/30fps@5MP(2592*1944) With Alarm, Audio and SD Slot	2.7-13.5mm Motorized
W728SGAHBB59A	8MP 30FPS	SSC339G+IMX415	8MP Realtime Human Body & Vehicle Detection 1/2.8" CMOS Sensor, 25/30fps@8MP(3840*2160) With Alarm, Audio and SD Slot	




4PCS Array IR LEDs	IR Distance: 30~40M
Support P2P, ONVIF	H.264 & H.265
Metal, IP67, POE	With Alarm, Audio, SD slot



Model	Res.	Chipset	Specification	Lens
W595BAHBB54A	5MP 30FPS	SSC378DE+IMX335	5MP Realtime, Human Body & Vehicle Detection 1/2.8" CMOS Sensor 25/30fps@6MP(3072*2048), 25/30fps@5MP(2592*1944)	3.6mm
W728AHBB54A	8MP 30FPS	SSC339G+MX415	8MP Realtime, Human Body & Vehicle Detection 1/2.8" CMOS Sensor 25/30fps@8MP(3840*2160)	3.6mm




18PCS SMD IR LEDs	IR Distance: 20-30M
Support P2P, ONVIF	H.264 & H.265
Metal, IP67, POE	MIC /SD Slot Optional



Model	Res.	Chipset	Specification	Lens
W595BSGAHBB78A	5MP 30FPS	SSC378DE+IMX335	5MP Realtime, Human Body & Vehicle Detection, 1/2.8" CMOS Sensor 25/30fps@6MP(3072*2048), 25/30fps@5MP(2592*1944) With Alarm, Audio and SD Slot	2.7-13.5mm Motorized
W728SGAHBB78A	8MP 30FPS	SSC339G+IMX415	8MP Realtime Human Body & Vehicle Detection 1/2.8" CMOS Sensor, 25/30fps@8MP(3840*2160) With Alarm, Audio and SD Slot	




24PCS SMD IR LEDs	IR Distance: 30~40M
Support P2P, ONVIF	H.264 & H.265
Metal, IP67, POE	With Alarm, Audio, SD slot

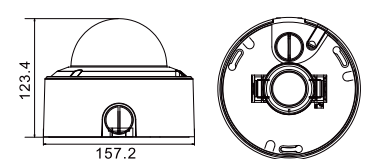

Model	Res.	Chipset	Specification	Lens
W595BAHBB59A	5MP 30FPS	SSC378DE+IMX335	5MP Realtime, Human Body & Vehicle Detection 1/2.8" CMOS Sensor 25/30fps@6MP(3072*2048), 25/30fps@5MP(2592*1944)	2.7-13.5mm/VF
W595BGAHBB59A				2.7-13.5mm Motorized
W728AHBB59A	8MP 30FPS	SSC339G+IMX415	8MP Realtime, Human Body & Vehicle Detection 1/2.8" CMOS Sensor, 25/30fps@8MP(3840*2160)	2.7-13.5mm/VF
W728GAHBB59A				2.7-13.5mm Motorized




4PCSArry IR LEDs	IR Distance: 30~40M
Support P2P, ONVIF	H.264 & H.265
Metal, IP67, POE	MIC /SD Slot Optional



Model	Res.	Chipset	Specification	Lens
W595BSGAHZ86A	5MP 30FPS	SSC378DE+IMX335	5MP Realtime Human Body & Vehide Detection, 1/2.8" CMOS Sensor 25/30fps@6MP(3072*2048), 25/30fps@5MP(2592*1944) With Alarm, Audio and SD Slot	2.7-13.5mm Motorized
W728SGAHZ86A	8MP 30FPS	SSC339G+IMX415	8MP Realtime Human Body & Vehicle Detection 1/2.8" CMOS Sensor, 25/30fps@8MP(3840*2160) With Alarm, Audio and SD Slot	




4PCS Array IR LEDs IR Distance: 70~80M
Support P2P, ONVIF H.264 & H.265
Metal, IP67, POE With Alarm, Audio, SD slot

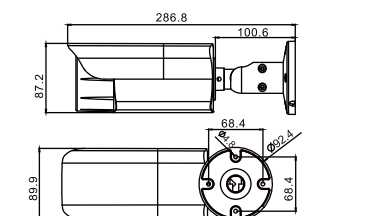

Model	Res.	Chipset	Specification	Lens
W595BAHBB78A	5MP 30FPS	SSC378DE+IMX335	5MP Realtime, Human Body & Vehicle Detection 1/2.8" CMOS Sensor 25/30fps@6MP(3072*2048), 25/30fps@5MP(2592*1944)	2.7-13.5mm/VF
W595BGAHBB78A				2.7-13.5mm Motorized
W728AHBB78A	8MP 30FPS	SSC339G+IMX415	8MP Realtime, Human Body & Vehicle Detection 1/2.8" CMOS Sensor, 25/30fps@8MP(3840*2160)	2.7-13.5mm/VF
W728GAHBB78A				2.7-13.5mm Motorized




24PCS SMD IR LEDs	IR Distance: 30~40M
Support P2P, ONVIF	H.264 & H.265
Metal, IP67, POE	MIC /SD Slot Optional



Model	Res.	Chipset	Specification	Lens
W595BSGAHZ56FA	5MP 30FPS	SSC378DE+IMX335	5MP Realtime, Human Body & Vehicle Detection, 1/2.8" CMOS Sensor 25/30fps@6MP(3072*2048), 25/30fps@5MP(2592*1944) With Alarm, Audio and SD Slot	2.7-13.5mm Motorized
W728SGAHZ56FA	8MP 30FPS	SSC339G+IMX415	8MP Realtime Human Body & Vehicle Detection 1/2.8" CMOS Sensor, 25/30fps@8MP(3840*2160) With Alarm, Audio and SD Slot	
W7312SGAHZ56FA	12MP 30FPS	SSC359G+IMX415	12MP Realtime Human Body & Vehicle Detection 1/2.3" CMOS Sensor, 30fps@12MP(4000x3000) With Alarm, Audio and SD Slot	3.6-10mm Motorized



20PCS SMD IR LEDs	IR Distance: 30~40M
Support P2P, ONVIF	H.264 & H.265
Metal, IP67, POE	With Alarm, Audio, SD slot

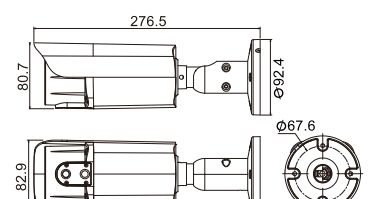

FULL COLOR 4IN1



HD Camera Series


2MP/5MP/8MP Full Color 4 in 1 HD Camera



Features

24/7 Full Color Image
2PCS Warm Lights Night Vision: 25-30M
IP67, Metal Audio Over Coaxial Optional


Model	Res.	Chipset	Specification	Lens	Signal Switch
T822CB97BA	2MP	TP3822+GC2053	2.0MP, 4 in 1 Colorvu, 1/2.9"CMOS sensor 25/30fps@1920*1080(1080p)	3.6mm/F1.6	UTC/DIP
T855FCB97BA	5MP	FH8538E+SSC501AI	5.0MP, 4 in 1 Colorvu, 1/2.7" CMOS Sensor AHD/TVI 20ps@5MP(2592*1944P) AHD/TVI/CVI 25/30fps@4MP(2560*1440P)		
T828CB97BA	8MP 4K	TP3818+IMX415	8.0MP, 4 in 1 Colorvu, 1/2.8"CMOS sensor AHD/TVI/CVI 15fps@3840*2160P CVBS: 25/30fps@960H		



Features

24/7 Full Color Image
2PCS Warm Lights Night Vision: 25-30M
IP67, Metal Audio Over Coaxial Optional


Model	Res.	Chipset	Specification	Lens	Signal Switch
T822CZ49EA	2MP	TP3822+GC2053	2.0MP, 4 in 1 Colorvu, 1/2.9"CMOS sensor 25/30fps@1920*1080(1080p)	3.6mm/F1.6	UTC/DIP
T855FCZ49EA	5MP	FH8538E+SSC501AI	5.0MP, 4 in 1 Colorvu, 1/2.7" CMOS Sensor AHD/TVI 20ps@5MP(2592*1944P) AHD/TVI/CVI 25/30fps@4MP(2560*1440P)		
T828CZ49EA	8MP 4K	TP3818+IMX415	8.0MP, 4 in 1 Colorvu, 1/2.8"CMOS sensor AHD/TVI/CVI 15fps@3840*2160P CVBS: 25/30fps@960H		



Features

24/7 Full Color Image
2PCS Warm Lights Night Vision: 25-30M
IP67, Metal Audio Over Coaxial Optional

Model	Res.	Chipset	Specification	Lens	Signal Switch
T822CZ37EA	2MP	TP3822+GC2053	2.0MP, 4 in 1 Colorvu, 1/2.9"CMOS sensor 25/30fps@1920*1080(1080p)	3.6mm/F1.6	UTC/DIP
T855FCZ37EA	5MP	FH8538E+SSC501AI	5.0MP, 4 in 1 Colorvu, 1/2.7" CMOS Sensor AHD/TVI 20ps@5MP(2592*1944P) AHD/TVI/CVI 25/30fps@4MP(2560*1440P)		
T828CZ37EA	8MP 4K	TP3818+IMX415	8.0MP, 4 in 1 Colorvu, 1/2.8"CMOS sensor AHD/TVI/CVI 15fps@3840*2160P CVBS: 25/30fps@960H		



4IN1 IR

2MP/5MP/8MP

HD Camera Series



Features

18PCS SMD IR LEDs
Metal, IP67

IR distance: 20-30M
Waterproof level: IP67



Features

2PCS Array IR LEDs
Material: Metal

IR distance: 20-30M
Waterproof level: IP67

Model	Res.	Chipset	Specification	Lens	Signal Switch
A822AHZ37EA	2MP	TP3822+GC2053	2.0MP, 4 in 1, 1/2.9"CMOS sensor 25/30fps@1920*1080(1080p) AOC Optional	3.6mm	UTC/DIP
A902BAHZ37EA	2MP	FH8536H+GC2083	2.0MP, 4 in 1, 1/3"CMOS sensor 25/30fps@1920*1080(1080p)	3.6mm	UTC/DIP
A612FAHZ37EA	2MP	NVP2441H+IMX307	2.0MP, 4 in 1, 1/2.8"CMOS sensor 25/30fps@1920*1080(1080p)	3.6mm	UTC/DIP
A852BAHZ37EA	2MP WDR	FH8550M+IMX307	2.0MP, 4 in 1 WDR, 1/2.8"CMOS sensor 25/30fps@1920*1080(1080p)	3.6mm	UTC/OSD
A855AHZ37EA	5MP	FH8538E+C18	5.0MP, 4 in 1, 1/2.5" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P) AOC Optional	3.6mm	UTC/DIP
A955AHZ37EA	5MP	FH8538M+IMX335	5.0MP, 4 in 1, 1/2.8" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P)	3.6mm	UTC/DIP
A965FAHZ37EA	5MP WDR	FH8556H+IMX335	5.0MP, 4 in 1 WDR, 1/2.8" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P)	3.6mm	UTC/DIP
T828AHZ37EA	8MP 4K	TP3818+IMX415	8.0MP, 4 in 1, 1/2.8" CMOS Sensor AHD/TVI/CVI 15fps@3840×2160P CVBS: 25/30fps@960H AOC Optional	3.6mm	UTC/DIP
T988FAHZ37EA	8MP 4K WDR	FH8556H+IMX415	8.0MP, 4 in 1 WDR, 1/2.8"CMOS sensor AHD/TVI/CVI 15fps@3840×2160P CVBS: 25/30fps@960H	3.6mm	UTC/DIP

Model	Res.	Chipset	Specification	Lens	Signal Switch
A822AHZ49EA	2MP	TP3822+GC2053	2.0MP, 4 in 1, 1/2.9"CMOS sensor 25/30fps@1920*1080(1080p) AOC Optional	3.6mm	UTC/DIP
A902BAHZ49EA	2MP	FH8536H+GC2083	2.0MP, 4 in 1, 1/3"CMOS sensor 25/30fps@1920*1080(1080p)	3.6mm	UTC/DIP
A612FAHZ49EA	2MP	NVP2441H+IMX307	2.0MP, 4 in 1, 1/2.8"CMOS sensor 25/30fps@1920*1080(1080p)	3.6mm	UTC/DIP
A852BAHZ49EA	2MP WDR	FH8550M+IMX307	2.0MP, 4 in 1 WDR, 1/2.8"CMOS sensor 25/30fps@1920*1080(1080p)	3.6mm	UTC/OSD
A855AHZ49EA	5MP	FH8538E+C18	5.0MP, 4 in 1, 1/2.5" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P) AOC Optional	3.6mm	UTC/DIP
A955AHZ49EA	5MP	FH8538M+IMX335	5.0MP, 4 in 1, 1/2.8" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P)	3.6mm	UTC/DIP
A965FAHZ49EA	5MP WDR	FH8556H+IMX335	5.0MP, 4 in 1 WDR, 1/2.8" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P)	3.6mm	UTC/DIP
T828AHZ49EA	8MP 4K	TP3818+IMX415	8.0MP, 4 in 1, 1/2.8" CMOS Sensor AHD/TVI/CVI 15fps@3840×2160P CVBS: 25/30fps@960H AOC Optional	3.6mm	UTC/DIP
T988FAHZ49EA	8MP 4K WDR	FH8556H+IMX415	8.0MP, 4 in 1 WDR, 1/2.8"CMOS sensor AHD/TVI/CVI 15fps@3840×2160P CVBS: 25/30fps@960H	3.6mm	UTC/DIP



Features

18PCS SMD IR LEDs IR distance: 20-30M
Material: Metal Waterproof level: IP67

Model	Res.	Chipset	Specification	Lens	Signal Switch
A822AHZ37FA	2MP	TP3822+GC2053	2.0MP, 4 in 1, 1/2.9"CMOS sensor 25/30fps@1920*1080(1080p) AOC Optional	3.6mm	UTC/DIP
A902BAHZ37FA	2MP	FH8536H+GC2083	2.0MP, 4 in 1, 1/3"CMOS sensor 25/30fps@1920*1080(1080p)	3.6mm	UTC/DIP
A612FAHZ37FA	2MP	NVP2441H+IMX307	2.0MP, 4 in 1, 1/2.8"CMOS sensor 25/30fps@1920*1080(1080p)	3.6mm	UTC/DIP
A852BAHZ37FA	2MP WDR	FH8550M+IMX307	2.0MP, 4 in 1 WDR, 1/2.8"CMOS sensor 25/30fps@1920*1080(1080p)	3.6mm	UTC/OSD
A855AHZ37FA	5MP	FH8538E+C18	5.0MP, 4 in 1, 1/2.5" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P) AOC Optional	3.6mm	UTC/DIP
A955AHZ37FA	5MP	FH8538M+IMX335	5.0MP, 4 in 1, 1/2.8" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P)	3.6mm	UTC/DIP
A965FAHZ37FA	5MP WDR	FH8556H+IMX335	5.0MP, 4 in 1 WDR, 1/2.8" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P)	3.6mm	UTC/DIP
T828AHZ37FA	8MP 4K	TP3818+IMX415	8.0MP, 4 in 1, 1/2.8" CMOS Sensor AHD/TVI/CVI 15fps@3840×2160P CVBS: 25/30fps@960H AOC Optional	3.6mm	UTC/DIP
T988FAHZ37FA	8MP 4K WDR	FH8556H+IMX415	8.0MP, 4 in 1 WDR, 1/2.8"CMOS sensor AHD/TVI/CVI 15fps@3840×2160P CVBS: 25/30fps@960H	3.6mm	UTC/DIP



Features

20PCS SMD IR LEDs IR distance: 30-40M
Material: Metal Waterproof level: IP67

Model	Res.	Chipset	Specification	Lens	Signal Switch
A822AHZ56EA	2MP	TP3822+GC2053	2.0MP, 4 in 1, 1/2.9"CMOS sensor 25/30fps@1920*1080(1080p) AOC Optional	2.8-12mm	UTC/DIP
A902BAHZ56EA	2MP	FH8536H+GC2083	2.0MP, 4 in 1, 1/3"CMOS sensor 25/30fps@1920*1080(1080p)	2.8-12mm	UTC/DIP
A612FAHZ56EA	2MP	NVP2441H+IMX307	2.0MP, 4 in 1, 1/2.8"CMOS sensor 25/30fps@1920*1080(1080p)	2.8-12mm	UTC/DIP
A852BAHZ56EA	2MP WDR	FH8550M+IMX307	2.0MP, 4 in 1 WDR, 1/2.8"CMOS sensor 25/30fps@1920*1080(1080p)	2.8-12mm	UTC/OSD
A855AHZ56EA	5MP	FH8538E+C18	5.0MP, 4 in 1, 1/2.5" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P) AOC Optional	3.3-12mm	UTC/DIP
A955AHZ56EA	5MP	FH8538M+IMX335	5.0MP, 4 in 1, 1/2.8" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P)	2.8-12mm	UTC/DIP
A965FAHZ56EA	5MP WDR	FH8556H+IMX335	5.0MP, 4 in 1 WDR, 1/2.8" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P)	2.8-12mm	UTC/DIP
T828AHZ56EA	8MP 4K	TP3818+IMX415	8.0MP, 4 in 1, 1/2.8" CMOS Sensor AHD/TVI/CVI 15fps@3840×2160P CVBS: 25/30fps@960H AOC Optional	2.8-12mm	UTC/DIP
T988FAHZ56EA	8MP 4K WDR	FH8556H+IMX415	8.0MP, 4 in 1 WDR, 1/2.8"CMOS sensor AHD/TVI/CVI 15fps@3840×2160P CVBS: 25/30fps@960H	2.8-12mm	UTC/DIP



Features

20PCS SMD IR LEDs IR distance: 30-40M
Material: Metal Waterproof level: IP67

Model	Res.	Chipset	Specification	Lens	Signal Switch
A822AHZ57EA	2MP	TP3822+GC2053	2.0MP, 4 in 1, 1/2.9"CMOS sensor 25/30fps@1920*1080(1080p) AOC Optional	2.8-12mm	UTC/DIP
A902BAHZ57EA	2MP	FH8536H+GC2083	2.0MP, 4 in 1, 1/3"CMOS sensor 25/30fps@1920*1080(1080p)	2.8-12mm	UTC/DIP
A612FAHZ57EA	2MP	NVP2441H+IMX307	2.0MP, 4 in 1, 1/2.8"CMOS sensor 25/30fps@1920*1080(1080p)	2.8-12mm	UTC/DIP
A852BAHZ57EA	2MP WDR	FH8550M+IMX307	2.0MP, 4 in 1 WDR, 1/2.8"CMOS sensor 25/30fps@1920*1080(1080p)	2.8-12mm	UTC/OSD
A855AHZ57EA	5MP	FH8538E+C18	5.0MP, 4 in 1, 1/2.5" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P) AOC Optional	3.3-12mm	UTC/DIP
A955AHZ57EA	5MP	FH8538M+IMX335	5.0MP, 4 in 1, 1/2.8" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P)	2.8-12mm	UTC/DIP
A965FAHZ57EA	5MP WDR	FH8556H+IMX335	5.0MP, 4 in 1 WDR, 1/2.8" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P)	2.8-12mm	UTC/DIP
T828AHZ57EA	8MP 4K	TP3818+IMX415	8.0MP, 4 in 1, 1/2.8" CMOS Sensor AHD/TVI/CVI 15fps@3840×2160P CVBS: 25/30fps@960H AOC Optional	2.8-12mm	UTC/DIP
T988FAHZ57EA	8MP 4K WDR	FH8556H+IMX415	8.0MP, 4 in 1 WDR, 1/2.8"CMOS sensor AHD/TVI/CVI 15fps@3840×2160P CVBS: 25/30fps@960H	2.8-12mm	UTC/DIP



Features

4PCS Array IR LEDs IR distance: 70-80M
Material: Metal Waterproof level: IP67

Model	Res.	Chipset	Specification	Lens	Signal Switch
A822AHZ86A	2MP	TP3822+GC2053	2.0MP, 4 in 1, 1/2.9"CMOS sensor 25/30fps@1920*1080(1080p) AOC Optional	2.8-12mm	UTC/DIP
A902BAHZ86A	2MP	FH8536H+GC2083	2.0MP, 4 in 1, 1/3"CMOS sensor 25/30fps@1920*1080(1080p)	2.8-12mm	UTC/DIP
A612FAHZ86A	2MP	NVP2441H+IMX307	2.0MP, 4 in 1, 1/2.8"CMOS sensor 25/30fps@1920*1080(1080p)	2.8-12mm	UTC/DIP
A852BAHZ86A	2MP WDR	FH8550M+IMX307	2.0MP, 4 in 1 WDR, 1/2.8"CMOS sensor 25/30fps@1920*1080(1080p)	2.8-12mm	UTC/OSD
A855AHZ86A	5MP	FH8538E+C18	5.0MP, 4 in 1, 1/2.5" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P) AOC Optional	3.3-12mm	UTC/DIP
A955AHZ86A	5MP	FH8538M+IMX335	5.0MP, 4 in 1, 1/2.8" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P)	2.8-12mm	UTC/DIP
A965FAHZ86A	5MP WDR	FH8556H+IMX335	5.0MP, 4 in 1 WDR, 1/2.8" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P)	2.8-12mm	UTC/DIP
T828AHZ86A	8MP 4K	TP3818+IMX415	8.0MP, 4 in 1, 1/2.8" CMOS Sensor AHD/TVI/CVI 15fps@3840×2160P CVBS: 25/30fps@960H AOC Optional	2.8-12mm	UTC/DIP
T988FAHZ86A	8MP 4K WDR	FH8556H+IMX415	8.0MP, 4 in 1 WDR, 1/2.8"CMOS sensor AHD/TVI/CVI 15fps@3840×2160P CVBS: 25/30fps@960H	2.8-12mm	UTC/DIP



Features

18PCS SMD IR LEDs
Material: Metal

IR distance: 20-30M
Waterproof level: IP67

Model	Res.	Chipset	Specification	Lens	Signal Switch
A822AHBB94CA	2MP	TP3822+GC2053	2.0MP, 4 in 1, 1/2.9"CMOS sensor 25/30fps@1920*1080(1080p) AOC Optional	3.6mm	UTC/DIP
A902BAHBB94CA	2MP	FH8536H+GC2083	2.0MP, 4 in 1, 1/3"CMOS sensor 25/30fps@1920*1080(1080p)	3.6mm	UTC/DIP
A612FAHBB94CA	2MP	NVP2441H+IMX307	2.0MP, 4 in 1, 1/2.8"CMOS sensor 25/30fps@1920*1080(1080p)	3.6mm	UTC/DIP
A852BAHBB94CA	2MP WDR	FH8550M+IMX307	2.0MP, 4 in 1 WDR, 1/2.8"CMOS sensor 25/30fps@1920*1080(1080p)	3.6mm	UTC/OSD
A855AHBB94CA	5MP	FH8538E+C18	5.0MP, 4 in 1, 1/2.5" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P) AOC Optional	3.6mm	UTC/DIP
A955AHBB94CA	5MP	FH8538M+IMX335	5.0MP, 4 in 1, 1/2.8" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P)	3.6mm	UTC/DIP
A965FAHBB94CA	5MP WDR	FH8556H+IMX335	5.0MP, 4 in 1 WDR, 1/2.8" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P)	3.6mm	UTC/DIP



Optional



Features

18PCS SMD IR LEDs
Material: Metal

IR distance: 20-30M
Waterproof level: IP67

Model	Res.	Chipset	Specification	Lens	Signal Switch
A822AHBB95EA	2MP	TP3822+GC2053	2.0MP, 4 in 1, 1/2.9"CMOS sensor 25/30fps@1920*1080(1080p) AOC Optional	3.6mm	UTC/DIP
A902BAHBB95EA	2MP	FH8536H+GC2083	2.0MP, 4 in 1, 1/3"CMOS sensor 25/30fps@1920*1080(1080p)	3.6mm	UTC/DIP
A612FAHBB95EA	2MP	NVP2441H+IMX307	2.0MP, 4 in 1, 1/2.8"CMOS sensor 25/30fps@1920*1080(1080p)	3.6mm	UTC/DIP
A852BAHBB95EA	2MP WDR	FH8550M+IMX307	2.0MP, 4 in 1 WDR, 1/2.8"CMOS sensor 25/30fps@1920*1080(1080p)	3.6mm	UTC/OSD
A855AHBB95EA	5MP	FH8538E+C18	5.0MP, 4 in 1, 1/2.5" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P) AOC Optional	3.6mm	UTC/DIP
A955AHBB95EA	5MP	FH8538M+IMX335	5.0MP, 4 in 1, 1/2.8" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P)	3.6mm	UTC/DIP
A965FAHBB95EA	5MP WDR	FH8556H+IMX335	5.0MP, 4 in 1 WDR, 1/2.8" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P)	3.6mm	UTC/DIP
T828AHBB95EA	8MP 4K	TP3818+IMX415	8.0MP, 4 in 1, 1/2.8" CMOS Sensor AHD/TVI/CVI 15fps@3840×2160P CVBS: 25/30fps@960H AOC Optional	3.6mm	UTC/DIP
T988FAHBB95EA	8MP 4K WDR	FH8556H+IMX415	8.0MP, 4 in 1 WDR, 1/2.8"CMOS sensor AHD/TVI/CVI 15fps@3840×2160P CVBS: 25/30fps@960H	3.6mm	UTC/DIP



Features

18PCS SMD IR LEDs
Material: Metal

IR distance: 20-30M
Waterproof level: IP67

Model	Res.	Chipset	Specification	Lens	Signal Switch
A822AHBB97A	2MP	TP3822+GC2053	2.0MP, 4 in 1, 1/2.9"CMOS sensor 25/30fps@1920*1080(1080p) AOC Optional	3.6mm	UTC/DIP
A902BAHBB97A	2MP	FH8536H+GC2083	2.0MP, 4 in 1, 1/3"CMOS sensor 25/30fps@1920*1080(1080p)	3.6mm	UTC/DIP
A612FAHBB97A	2MP	NVP2441H+IMX307	2.0MP, 4 in 1, 1/2.8"CMOS sensor 25/30fps@1920*1080(1080p)	3.6mm	UTC/DIP
A852BAHBB97A	2MP WDR	FH8550M+IMX307	2.0MP, 4 in 1 WDR, 1/2.8"CMOS sensor 25/30fps@1920*1080(1080p)	3.6mm	UTC/OSD
A855AHBB97A	5MP	FH8538E+C18	5.0MP, 4 in 1, 1/2.5" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P) AOC Optional	3.6mm	UTC/DIP
A955AHBB97A	5MP	FH8538M+IMX335	5.0MP, 4 in 1, 1/2.8" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P)	3.6mm	UTC/DIP
A965FAHBB97A	5MP WDR	FH8556H+IMX335	5.0MP, 4 in 1 WDR, 1/2.8" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P)	3.6mm	UTC/DIP
T828AHBB97A	8MP 4K	TP3818+IMX415	8.0MP, 4 in 1, 1/2.8" CMOS Sensor AHD/TVI/CVI 15fps@3840×2160P CVBS: 25/30fps@960H AOC Optional	3.6mm	UTC/DIP
T988FAHBB97A	8MP 4K WDR	FH8556H+IMX415	8.0MP, 4 in 1 WDR, 1/2.8"CMOS sensor AHD/TVI/CVI 15fps@3840×2160P CVBS: 25/30fps@960H	3.6mm	UTC/DIP



Optional



Features

18PCS SMD IR LEDs
Material: Metal

IR distance: 20-30M
Waterproof level: IP67

Model	Res.	Chipset	Specification	Lens	Signal Switch
A822AHBB95DA	2MP	TP3822+GC2053	2.0MP, 4 in 1, 1/2.9"CMOS sensor 25/30fps@1920*1080(1080p) AOC Optional	2.8-12mm	UTC/DIP
A902BAHBB95DA	2MP	FH8536H+GC2083	2.0MP, 4 in 1, 1/3"CMOS sensor 25/30fps@1920*1080(1080p)	2.8-12mm	UTC/DIP
A612FAHBB95DA	2MP	NVP2441H+IMX307	2.0MP, 4 in 1, 1/2.8"CMOS sensor 25/30fps@1920*1080(1080p)	2.8-12mm	UTC/DIP
A852BAHBB95DA	2MP WDR	FH8550M+IMX307	2.0MP, 4 in 1 WDR, 1/2.8"CMOS sensor 25/30fps@1920*1080(1080p)	2.8-12mm	UTC/OSD
A855AHBB95DA	5MP	FH8538E+C18	5.0MP, 4 in 1, 1/2.5" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P) AOC Optional	3.3-12mm	UTC/DIP
A955AHBB95DA	5MP	FH8538M+IMX335	5.0MP, 4 in 1, 1/2.8" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P)	2.8-12mm	UTC/DIP
A965FAHBB95DA	5MP WDR	FH8556H+IMX335	5.0MP, 4 in 1 WDR, 1/2.8" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P)	2.8-12mm	UTC/DIP
T828AHBB95DA	8MP 4K	TP3818+IMX415	8.0MP, 4 in 1, 1/2.8" CMOS Sensor AHD/TVI/CVI 15fps@3840×2160P CVBS: 25/30fps@960H AOC Optional	2.8-12mm	UTC/DIP
T988FAHBB95DA	8MP 4K WDR	FH8556H+IMX415	8.0MP, 4 in 1 WDR, 1/2.8"CMOS sensor AHD/TVI/CVI 15fps@3840×2160P CVBS: 25/30fps@960H	2.8-12mm	UTC/DIP



Optional



Features

18PCS SMD IR LEDs
Material: Metal
IR distance: 20-30M
Waterproof level: IP67

Model	Res.	Chipset	Specification	Lens	Signal Switch
A822AHBB54A	2MP	TP3822+GC2053	2.0MP, 4 in 1, 1/2.9"CMOS sensor 25/30fps@1920*1080(1080p) AOC Optional	2.8-12mm	UTC/DIP
A902BAHBB54A	2MP	FH8536H+GC2083	2.0MP, 4 in 1, 1/3"CMOS sensor 25/30fps@1920*1080(1080p)	2.8-12mm	UTC/DIP
A612FAHBB54A	2MP	NVP2441H+IMX307	2.0MP, 4 in 1, 1/2.8"CMOS sensor 25/30fps@1920*1080(1080p)	2.8-12mm	UTC/DIP
A852BAHBB54A	2MP WDR	FH8550M+IMX307	2.0MP, 4 in 1 WDR, 1/2.8"CMOS sensor 25/30fps@1920*1080(1080p)	2.8-12mm	UTC/OSD
A855AHBB54A	5MP	FH8538E+C18	5.0MP, 4 in 1, 1/2.5" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P) AOC Optional	3.3-12mm	UTC/DIP
A955AHBB54A	5MP	FH8538M+IMX335	5.0MP, 4 in 1, 1/2.8" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P)	2.8-12mm	UTC/DIP
A965FAHBB54A	5MP WDR	FH8556H+IMX335	5.0MP, 4 in 1 WDR, 1/2.8" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P)	2.8-12mm	UTC/DIP
T828AHBB54A	8MP 4K	TP3818+IMX415	8.0MP, 4 in 1, 1/2.8" CMOS Sensor AHD/TVI/CVI 15fps@3840×2160P CVBS: 25/30fps@960H AOC Optional	2.8-12mm	UTC/DIP
T988FAHBB54A	8MP 4K WDR	FH8556H+IMX415	8.0MP, 4 in 1 WDR, 1/2.8"CMOS sensor AHD/TVI/CVI 15fps@3840×2160P CVBS: 25/30fps@960H	2.8-12mm	UTC/DIP



Features

4PCS IR Array LEDs
Material: Metal
IR distance: 30-40M
Waterproof level: IP67

Model	Res.	Chipset	Specification	Lens	Signal Switch
A822AHBB59A	2MP	TP3822+GC2053	2.0MP, 4 in 1, 1/2.9"CMOS sensor 25/30fps@1920*1080(1080p) AOC Optional	2.8-12mm	UTC/DIP
A902BAHBB59A	2MP	FH8536H+GC2083	2.0MP, 4 in 1, 1/3"CMOS sensor 25/30fps@1920*1080(1080p)	2.8-12mm	UTC/DIP
A612FAHBB59A	2MP	NVP2441H+IMX307	2.0MP, 4 in 1, 1/2.8"CMOS sensor 25/30fps@1920*1080(1080p)	2.8-12mm	UTC/DIP
A852BAHBB59A	2MP WDR	FH8550M+IMX307	2.0MP, 4 in 1 WDR, 1/2.8"CMOS sensor 25/30fps@1920*1080(1080p)	2.8-12mm	UTC/OSD
A855AHBB59A	5MP	FH8538E+C18	5.0MP, 4 in 1, 1/2.5" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P) AOC Optional	3.3-12mm	UTC/DIP
A955AHBB59A	5MP	FH8538M+IMX335	5.0MP, 4 in 1, 1/2.8" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P)	2.8-12mm	UTC/DIP
A965FAHBB59A	5MP WDR	FH8556H+IMX335	5.0MP, 4 in 1 WDR, 1/2.8" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P), AHD/TVI/CVI 25/30 fps@4MP(2560×1440P)	2.8-12mm	UTC/DIP
T828AHBB59A	8MP 4K	TP3818+IMX415	8.0MP, 4 in 1, 1/2.8" CMOS Sensor AHD/TVI/CVI 15fps@3840×2160P CVBS: 25/30fps@960H AOC Optional	2.8-12mm	UTC/DIP
T988FAHBB59A	8MP 4K WDR	FH8556H+IMX415	8.0MP, 4 in 1 WDR, 1/2.8"CMOS sensor AHD/TVI/CVI 15fps@3840×2160P CVBS: 25/30fps@960H	2.8-12mm	UTC/DIP



Optional

Model	Res.	Chipset	Specification	Lens	Signal Switch
A612SGAHBB95EA	2MP	NVP2441H + IMX307	2.0MP, 4 in 1, 1/2.8" CMOS Sensor 25/30fps@1920*1080(1080p)	2.8-12mm Motorized	UTC/DIP
A965FGAHBB95EA	5MP WDR	FH8556H+IMX335	5.0MP, 4 in 1, 1/2.8" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P) AHD/TVI/CVI 25/30 fps@4MP(2560×1440P)	2.7-13.5mm Motorized	
T988FGAHBB95EA	8MP WDR	FH8556H+IMX415	8.0MP, 4 in 1 WDR, 1/2.8" CMOS Sensor AHD/TVI/CVI 15fps@3840×2160P CVBS: 25/30fps@960H		



Optional

Model	Res.	Chipset	Specification	Lens	Signal Switch
A612SGAHBB54A	2MP	NVP2441H + IMX307	2.0MP, 4 in 1, 1/2.8" CMOS Sensor 25/30fps@1920*1080(1080p)	2.8-12mm Motorized	UTC/DIP
A965FGAHBB54A	5MP WDR	FH8556H+IMX335	5.0MP, 4 in 1, 1/2.8" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P) AHD/TVI/CVI 25/30 fps@4MP(2560×1440P)	2.7-13.5mm Motorized	
T988FGAHBB54A	8MP WDR	FH8556H+IMX415	8.0MP, 4 in 1 WDR, 1/2.8" CMOS Sensor AHD/TVI/CVI 15fps@3840×2160P CVBS: 25/30fps@960H		




Model	Res.	Chipset	Specification	Lens	Signal Switch
A612SGAHBB59A	2MP	NVP2441H + IMX307	2.0MP, 4 in 1, 1/2.8" CMOS Sensor 25/30fps@1920*1080(1080p)	2.8-12mm Motorized	UTC/DIP
A965FGAHBB59A	5MP WDR	FH8556H+IMX335	5.0MP, 4 in 1, 1/2.8" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P) AHD/TVI/CVI 25/30 fps@4MP(2560×1440P)	2.7-13.5mm Motorized	
T988FGAHBB59A	8MP WDR	FH8556H+IMX415	8.0MP, 4 in 1 WDR, 1/2.8" CMOS Sensor AHD/TVI/CVI 15fps@3840×2160P CVBS: 25/30fps@960H		




Features

18PCS SMD IR LEDs
IR distance: 20-30M
Metal, IP67




Features

18PCS SMD IR LEDs
IR distance: 20-30M
Metal, IP67



Features

4PCS Array IR LEDs
IR distance: 30-40M
Metal, IP67






Model	Res.	Chipset	Specification	Lens	Signal Switch
A612SGAHZ56FA	2MP	NVP2441H + IMX307	2.0MP, 4 in 1, 1/2.8" CMOS Sensor 25/30fps@1920*1080(1080p)	2.8-12mm Motorized	UTC/DIP
A965FGAHZ56FA	5MP WDR	FH8556H+IMX335	5.0MP, 4 in 1, 1/2.8" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P) AHD/TVI/CVI 25/30 fps@4MP(2560×1440P)	2.7-13.5mm Motorized	
T988FGAHZ56FA	8MP WDR	FH8556H+IMX415	8.0MP, 4 in 1 WDR, 1/2.8" CMOS Sensor AHD/TVI/CVI15fps@3840×2160P CVBS: 25/30fps@960H		



Features

20PCS SMD IR LEDs
IR distance: 30-40M
Metal, IP67

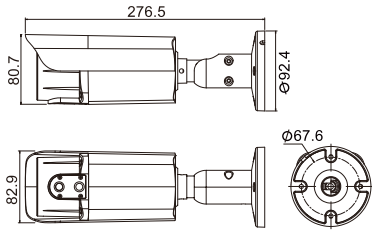


Model	Res.	Chipset	Specification	Lens	Signal Switch
A612SGAHZ57FA	2MP	NVP2441H + IMX307	2.0MP, 4 in 1, 1/2.8" CMOS Sensor 25/30fps@1920*1080(1080p)	2.8-12mm Motorized	UTC/DIP
A965FGAHZ57FA	5MP WDR	FH8556H+IMX335	5.0MP, 4 in 1, 1/2.8" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P) AHD/TVI/CVI 25/30 fps@4MP(2560×1440P)	2.7-13.5mm Motorized	
T988FGAHZ57FA	8MP WDR	FH8556H+IMX415	8.0MP, 4 in 1 WDR, 1/2.8" CMOS Sensor AHD/TVI/CVI15fps@3840×2160P CVBS: 25/30fps@960H		



Features

20PCS SMD IR LEDs
IR distance: 30-40M
Metal, IP67

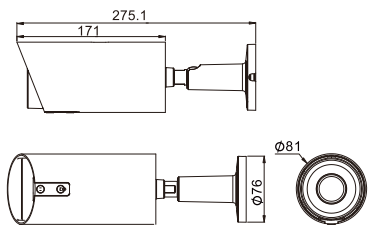


Model	Res.	Chipset	Specification	Lens	Signal Switch
A612SGAHZ86A	2MP	NVP2441H + IMX307	2.0MP, 4 in 1, 1/2.8" CMOS Sensor 25/30fps@1920*1080(1080p)	2.8-12mm Motorized	UTC/DIP
A612SGAHZ86A-10X				5-50mm Motorized	
A965FGAHZ86A	5MP WDR	FH8556H+IMX335	5.0MP, 4 in 1, 1/2.8" CMOS Sensor AHD/TVI 20ps@5MP(2592×1944P) AHD/TVI/CVI 25/30 fps@4MP(2560×1440P)	2.7-13.5mm Motorized	
A965BGAHZ86A-10X				5-50mm Motorized	
T988FGAHZ86A	8MP WDR	FH8556H+IMX415	8.0MP, 4 in 1 WDR, 1/2.8" CMOS Sensor AHD/TVI/CVI15fps@3840×2160P CVBS: 25/30fps@960H	2.7-13.5mm Motorized	



Features

4PCS Array IR LEDs
IR distance: 70-80M
Metal, IP67

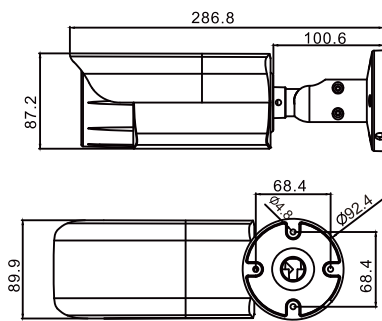

SMART PTZ & WIFI POE IP Camera



6MP 4X Optical Zoom IP Mini Bullet PTZ

W716FG-30PTZ-V2



- 1/2.8" Sony CMOS sensor
- 25fps@6MP(3072x2048P)
- 4X Optical Zoom, 2.8-12mm AF Lens
- 6 pcs SMD Array IR Leds
- 30-40m IR Distance
- Pan Range: 0°~180°; Tilt Range: 0°~55°
- Pan Speed: 0.5°~20°/s; Tilt Speed: 0.5°~10°/s
- 1 Preset, Two-way Audio
- IP66, Internal POE, Anti-flicker
- Human and Vehicle detection

6MP 10X Optical Zoom IP Bullet PTZ

YMHD716FIRP-10X-V2



- 1/2.8"Sony IMX335 CMOS Sensor
- 25fps@6MP(3072*2048)
- 10X Optical Zoom, 5.1-51mm AF Lens
- 4pcs Array IR LEDs, 80m IR Distance
- Pan Range: 0°~300°; Tilt Range: -5°~60°
- Pan Speed: 0.5°~12°/s; Tilt Speed: 0.5°~10°/s
- 8 Preset
- IP66, Internal POE, Anti-flicker
- Human and Vehicle detection

2inch 6MP 3X Optical Zoom IP Dome PTZ

M716IR-3X -V4



- 1/2.8"Sony IMX335 CMOS Sensor
- 25fps@6MP(3072*2048)
- 3X Optical Zoom, 2.8-8mm AF Lens
- 3pcs SMD Array IR LEDs, 30m IR Distance
- Pan Range: 0°~350°; Tilt Range: 5°~90°
- Pan Speed: 0.5°~40°/s; Tilt Speed: 0.5°~30°/s
- 1 Preset, Built-in MIC
- IP66, Internal POE
- Human and Vehicle detection

4Inch 6MP 20X Optical Zoom IP Dual Light PTZ

W716FIRC-HS20X-HP4



- 1/2.8"Sony IMX335 CMOS Sensor
- 25fps@6MP(3072*2048)
- 20X Optical Zoom, 4.7-94mm AF Lens
- 8pcs Array IR LEDs, 100m IR distance
- 2pcs White Light LEDs, 50m night vision distance
- Pan Range: 0°~360°; Tilt Range: -15°~90°
- Pan Speed: 0°~100°/s; Tilt Speed: 0°~80°/s
- Two-way Audio, MicroSD slot, Reset key
- 256 Preset, 1Set Auto cruise(Max.32 presets)
- IP66, Internal POE, Anti-flicker, With Wiper
- Human Tracking and Vehicle Detection

4.5Inch 6MP 20X Optical Zoom IP Dual Light PTZ

W716FIRC-YS20X-Y



- 1/2.8"Sony IMX335 CMOS Sensor
- 25fps@6MP(3072*2048)
- 20X Optical Zoom, 4.7-94mm AF Lens
- 6pcs Array IR LEDs, 80m IR distance
- 4pcs White Lights, 40m night vision
- Pan Range: 0°~360°; TiltRange: -5°~90°
- Pan Speed: 0.5°~30°/s; Tilt Speed: 0.5°~30/s
- 256 Presets, 8 Sets Auto cruise
- Two-way Audio, MicroSD slot
- IP66, Internal POE, Anti-flicker
- Human Tracking and Vehicle detection

7Inch 6MP 20X Optical Zoom IP Dual Light PTZ

W716FIRC-HS20X-Y7



- 1/2.8" Sony IMX335 CMOS Sensor
- 25fps@6MP(3072*2048)
- 20X Optical Zoom, 4.7-94mm AF Lens
- 6pcs IR LEDs & Warm Light, IR Distance: 120M
- 4pcs Laser IR Leds, Light Distance: 40M
- Pan Range: 0°~360°; Tilt Range: -5°~90°
- Pan Speed: 0.5°~60°/s; Tilt Speed: 0.5°~60°/s
- 256 Preset, 8 Sets Auto cruise
- Two-way Audio, MicroSD slot, Reset key
- IP66, Internal POE, Anti-flicker
- Human Tracking and Vehicle detection

6MP 5X Optical Zoom IP Dual Light Turret PTZ

M716FIRC-5X-HS-B



- 1/2.8"Sony IMX335 CMOS Sensor
- 25fps@6MP(3072*2048)
- 5X Optical Zoom, 2.7-13.5mm AF Lens
- 4pcs IR & Warm Dual-Light LEDs
- 40m Light Distance
- Pan Range: 0°~280°; Tilt Range: 0°~55°
- Pan Speed: 15°/s; Tilt Speed: 15°/s
- Two-way Audio, SD slot, Reset key
- IP66, Internal POE, Anti-flicker
- Human and Vehicle detection

6MP 5X Optical Zoom IP Dome PTZ

M716FIRM3-5X



- 1/2.8"Sony IMX335 CMOS Sensor
- 25fps@6MP(3072*2048)
- 5X Optical Zoom, 2.7-13.5mm AF Lens
- 8pcs SMD ArrayIR LEDs, 40m IR Distance
- Pan Range: 0°~350°; Tilt Range: 0°~87°
- Pan Speed: 50°/s; Tilt Speed: 50°/s
- 1 Preset, Two-way Audio, SD slot, Reset Key
- IP67, Internal POE, Anti-flicker
- Human and Vehicle detection

3 Inch 6MP 5X Optical Zoom IP Dual Light PTZ

M716FIRC-5X



- 1/2.8"Sony IMX335 CMOS Sensor
- 25fps@6MP(3072*2048)
- 5X Optical Zoom, 2.7-13.5mm AF Lens
- 6pcs Array IR LEDs, 60m IR Distance
- 2pcs White Light, 20m night vision distance
- Pan Range: 0°~355°; Tilt Range: -15°~90°
- Pan Speed: 0.5°~20°/s; Tilt Speed: 0.5°~20°/s
- 7 Presets, Two way Audio, SD slot, Reset Key
- IP66, Internal POE, Anti-flicker
- Human and Vehicle detection

4Inch 8MP 20X Optical Zoom IP Dual Light PTZ

W798FIRC-HS20X-HP4



- 1/2.8"Sony IMX415 CMOS Sensor
- 20fps@8MP(3840*2160)
- 20X Optical Zoom, 4.7-94mm AF Lens
- 8pcs Array IR LEDs, 100m IR distance
- 2pcs White Light LEDs, 50m night vision distance
- Pan Range: 0°~360°; Tilt Range: -15°~90°
- Pan Speed: 0°~100°/s; Tilt Speed: 0°~80°/s
- Two-way Audio, MicroSD slot, Reset key
- 256 Preset, 1 Set Auto cruise(Max.32 presets)
- IP66, Internal POE, With Wiper
- Human Tracking and Vehicle Detection

4.5Inch 8MP 20X Optical Zoom IP Dual Light PTZ

W798FIRC-YS20X-Y



- 1/2.8"Sony IMX415 CMOS Sensor
- 20fps@8 MP(3840*2160)
- 20X Optical Zoom, 4.7-94mm AF Lens
- 6pcs Array IR LEDs, 80m IR distance
- 4pcs White Lights, 40m night vision
- Pan Range: 0°~360°; Tilt Range: -5°~90°
- Pan Speed: 0.5°~30°/s; Tilt Speed: 0.5°~30°/s
- 256 Presets, 8 Sets Auto cruise
- Two-way Audio, MicroSD slot
- IP66, Lightning Protection, Internal POE
- Human and Vehicle detection
- Human Detection Tracking together with Patrol

7Inch 8MP 20X Optical Zoom IP Dual Light PTZ

W798FIRC-HS20X-Y7



- 1/2.8" Sony IMX415 CMOS Sensor
- 20fps@8MP(3840*2160)
- 20X Optical Zoom, 4.7-94mm AF Lens
- 6pcs IR LEDs & Warm Light, IR Distance: 120M
- 4pcs Laser IR Leds, Light Distance: 40M
- Pan Range: 0°~360°; Tilt Range: -5°~90°
- Pan Speed: 0.5°~60°/s; Tilt Speed: 0.5°~60°/s
- 256 Preset, 8 Sets Auto cruise
- Two-way Audio, MicroSD slot, Reset key
- IP66, Lightning Protection, Internal POE
- Human and Vehicle detection
- Human Detection Tracking together with Patrol

8MP 5X Optical Zoom IP Dual Light Mini PTZ

M798FIRC-5X-HS-B



- 1/2.8"Sony IMX415 CMOS Sensor
- 20fps@8MP(3840*2160)
- 5X Optical Zoom, 2.7-13.5mm AF Lens
- 4pcs IR & Warm Dual Light LEDs
- 40m Light Distance
- Pan Range: 0°~280°; Tilt Range: 0°~55°
- Pan Speed: 15°/s; Tilt Speed: 15°/s
- Two-way Audio, SD slot, Reset key
- IP66, Internal POE, Anti-flicker
- Human and Vehicle detection

8MP 5X Optical Zoom IP Dome PTZ

M798FIRM3-5X



- 1/2.8"SonyIMX415 CMOS Sensor
- 20fps@8MP(3840*2160)
- 5X Optical Zoom, 2.7-13.5mm AF Lens
- 8pcs SMD ArrayIR LEDs, 40m IR Distance
- Pan Range: 0°~350°; Tilt Range: 0°~87°
- Pan Speed: 50°/s; Tilt Speed: 50°/s
- 1 Preset, Two-way Audio, SD slot, Reset Key
- IP67, Internal POE, Anti-flicker
- Human and Vehicle detection

3 Inch 8MP 5X Optical Zoom IP Dual Light PTZ

M798FIRC-5X



- 1/2.8"Sony IMX415 CMOS Sensor
- 20fps@8MP(3840*2160)
- 5X Optical Zoom, 2.7-13.5mm AF Lens
- 4pcs IR & Warm Dual Light LEDs
- 40m Light Distance
- Pan Range: 0°~280°; Tilt Range: 0°~55°
- Pan Speed: 0.5°~20°/s; Tilt Speed: 0.5°~20°/s
- Two-way audio, SD slot, Reset key
- IP66, Internal POE, Anti-flicker
- Human and Vehicle detection

7Inch 8MP 25X Optical Zoom IP Dual Light PTZ

W798FIRC-HS25X-Y7



- 1/2.8" Sony IMX415 CMOS Sensor
- 20fps@8MP(3840*2160)
- 25X Optical Zoom, 4.8-120mm AF Lens
- 6pcs IR LEDs & Warm Light, IR Distance: 120M
- 4pcs Laser IR Leds, Light Distance: 40M
- Pan Range: 0°~360°; Tilt Range: -5°~90°
- Pan Speed: 0.5°~60°/s; Tilt Speed: 0.5°~60°/s
- 256 Preset, 8 Sets Auto cruise
- MicroSD slot, Reset key
- IP66, Lightning Protection, Internal POE
- Human and Vehicle detection
- Human Detection Tracking together with Patrol

7Inch 8MP 33X Optical Zoom IP Dual Light PTZ

W798FIRC-HS33X-Y7



- 1/2.8" Sony IMX415 CMOS Sensor
- 20fps@8MP(3840*2160)
- 33X Optical Zoom, 4.5-148.5mm AF Lens
- 6pcs IR LEDs & Warm Light, IR Distance: 120M
- 4pcs Laser IR Leds, Light Distance: 40M
- Pan Range: 0°~360°; Tilt Range: -5°~90°
- Pan Speed: 0.5°~60°/s; Tilt Speed: 0.5°~60°/s
- 256 Preset, 8 Sets Auto cruise
- Two-way Audio, MicroSD slot
- IP66, Lightning Protection, Internal POE
- Human and Vehicle detection
- Human Detection Tracking together with Patrol

6Inch 8MP 33X Optical Zoom IP IR PTZ

M798FSIR-33X-HS



- 1/2.8"Sony IMX415 CMOS Sensor
- 20fps@8MP(3840*2160)
- 33X Optical Zoom, 4.5-148.5mm AF Lens
- 10pcs Array IR LEDs, 120m IR distance
- Pan Range: 0°~360°; Tilt Range: -10°~90°
- Pan Speed: 0.01°~120°/s; Tilt Speed: 0.01°~120°/s
- 256 Presets, 8 Sets Auto cruise
- 8 Sets Auto Scanning, 4Sets Pattern Scanning
- IP66, Lighting Protection, with wiper
- Support Alarm, Audio in/out and SD slot, Heater
- Human and Vehicle detection

H.265 2MP WIFI Dome Camera

WF952FAHBB54A



- 1/2.7"SC2235 CMOS sensor
- 20fps@1080P(1920*1080)
- 2.8mm Fixed Lens
- 18pcs SMD IR LEDs, 20-30M IR Distance
- 2.4G Bgn 3DB WIFI antenna
- Built-in MIC, Support SD Card up to 128GB
- Support PC CMS, NVR by Onvif
- Mobile App: CamHipro

H.265 2MP WIFI Bullet Camera

WF952FAHZ37HA



- 1/2.7"SC2235 CMOS sensor
- 20fps@1080P(1920*1080)
- 2.8mm Fixed Lens
- 18pcs SMD IR LEDs, 20-30M IR Distance
- 2.4G Bgn 3DB WIFI antenna
- Two-way Audio, Support SD Card up to 128GB
- Support PC CMS, NVR by Onvif
- Mobile App: CamHipro

H.265 2MP WIFI Mini PT Dome Camera

WF952FIRC-PT-BTJ



- 1/2.7"SC2235 CMOS sensor
- 20fps@1080P(1920*1080)
- 4mm Fixed Lens
- 6 pcs Array IR Led, IR distance 20-30 meters
- 4 pcs Warm 3600k lights, Lighting distance: 20M
- When Detect Human at Night, Warm light will be on
- Pan: 0°~ 355°; Tilt: 0°~92°
- Pan Speed: 0.5°~20°/s; Tilt: 0.5°~20°/s
- 7 Preset Point
- 2.4G Bgn 3DB WIFI antenna
- Two-way Audio, Support SD Card up to 128GB
- Support PC CMS, NVR by Onvif
- Mobile App: CamHipro

H.265 5MP WIFI Dome Camera

WF955FAHBB54A



- 1/2.7"SC5603 CMOS sensor
- 15fps@5MP(2880*1620), 4MP(2560*1440)
- 2.8mm Fixed Lens
- 18pcs SMD IR LEDs, 20-30M IR Distance
- 2.4G Bgn 3DB WIFI antenna
- Built-in MIC, Support SD Card up to 128GB
- Support PC CMS, NVR by Onvif
- Mobile App: CamHipro

H.265 5MP WIFI Bullet Camera

WF955FAHZ37HA



- 1/2.7"SC5603 CMOS sensor
- 15fps@5MP(2880*1620), 4MP(2560*1440)
- 2.8mm Fixed Lens
- 18pcs SMD IR LEDs, 20-30M IR Distance
- 2.4G Bgn 3DB WIFI antenna
- Two-way Audio, Support SD Card up to 128GB
- Support PC CMS, NVR by Onvif
- Mobile App: CamHipro

H.265 4MP WIFI Mini PT Dome Camera

WF944FIRC-PT-BTJ



- 1/3" SC4336P CMOS sensor
- 20fps@4MP(2560*1440)
- 4mm Fixed Lens
- 6 pcs Array IR Led, IR distance 20-30 meters
- 4 pcs Warm 3600k lights, Lighting distance: 20M
- When Detect Human at Night, Warm light will be on
- Pan: 0°~ 355°; Tilt: 0°~92°
- 7 Preset Point
- 2.4G Bgn 3DB WIFI antenna
- Two-way Audio, Support SD Card up to 128GB
- Support PC CMS, NVR by Onvif
- Mobile App: CamHipro

3MP AOV Solar 4G Camera

3MP-PTAOV-4G



- Support 4G LTE
- Support 250ms fast startup
- IP65, outdoor camera
- PTZ Camera, Pan: 0°~355°, Tilt: 0°~90°
- Support TF card (Up to 512GB) / Cloud storage
- 9000 mAh rechargeable Li batteries
- Support powered by solar panel(6w)
- Support 24h all-day video recording in the absence of power and internet, no alerts missed
- Support humanoid detection, two-way voice intercom, intelligent playback
- Ultravision motion detection, 30 meters human sensing distance
- With Solar Panel: 6W (Size: 191*170mm)

3MP AOV Solar WIFI Camera

3MP-PTAOV-WF



- Support WIFI
- Support 250ms fast startup
- IP65, outdoor camera
- PTZ Camera, Pan: 0°~355°,Tilt: 0°~90°
- Support TF card (Up to 512GB) / Cloud storage
- 9000 mAh rechargeable Li batteries
- Support powered by solar panel(6w)
- Support 24h all-day video recording in the absence of power and internet,no alerts missed
- Support humanoid detection, two-way voice intercom, intelligent playback
- Ultravision motion detection, 30 meters human sensing distance
- With Solar Panel: 6W (Size: 191*170mm)

H.265 4 CH Enhanced 3MP WIFI LCD NVR COMBO

WF-9302B2DLEA-MS



- 4pc* 3MP IP Wireless Camera
- 1pc* 4CH 12.5" LCD NVR
- 1pc* Network Cable
- 1pc* Mouse
- 1pc*12V/2A Power Supply (for NVR)
- 4pc*12V/1A Power Supply (for Camera)
- 200M Signal Transmission Distance

H.265 8 CH Enhanced 3MP WIFI LCD NVR COMBO

WF-9304B4PLEA-MS



- 8pc*3MP IP Wireless Camera
- 1pc* 8CH 12.5" LCD NVR
- 1pc* Network Cable
- 1pc* Mouse
- 1pc*12V/2A Power Supply (for NVR)
- 8pc*12V/1A Power Supply (for Camera)
- 200M Signal Transmission Distance

H.265 4 CH Enhanced 3MP WIFI KIT

WF-9304BNE-M



- 4pc* 3MP IP Wireless Camera
- 1pc* 4CH NVR
- 1pc* Network Cable
- 1pc* Mouse
- 1pc*12V/2A Power Supply (for NVR)
- 4pc*12V/1A Power Supply (for Camera)
- 200M Signal Transmission Distance

H.265 8 CH Enhanced 3MP WIFI KIT

WF-9304B4PNE-M



- 8pc* 3MP HD IP Wireless Camera
- 1pc* 8CH NVR
- 1pc* Network cable
- 1pc* Mouse
- 1pc*12V/2A Power Supply (for NVR)
- 8pc*12V/1A Power Supply (for Camera)
- 200M Signal Transmission Distance

ACUSEARCH

The YCX IQ Series NVR offers advanced search capabilities developed to streamline video footage retrieval, just one pick with target human&vehicle picture, perfect and fast match to locate infomation from Liveview to Playback.

Technology Edge



Smart Acute Search



Selected Zone Search





Targeted One-Click Search



Quickly Locate Target

VCA Search Include

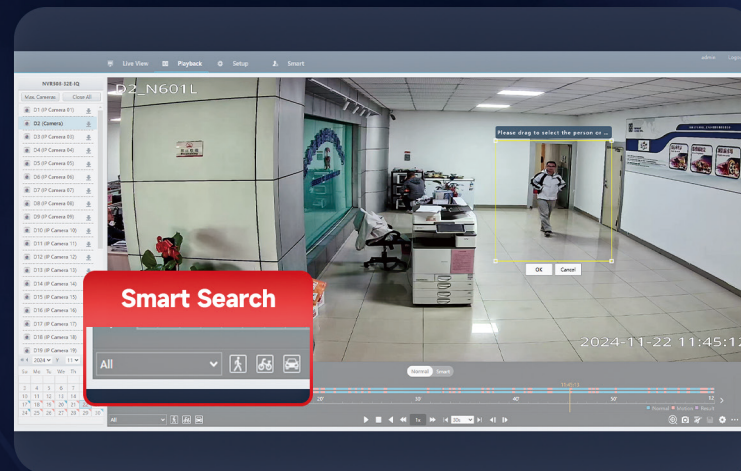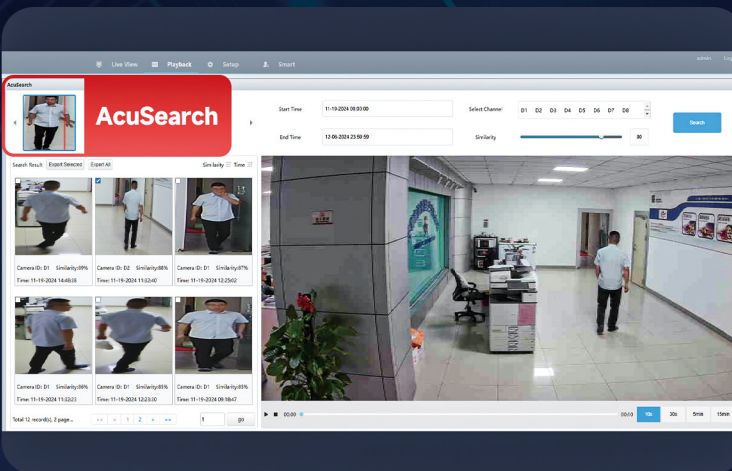

Face Snapshot Search



Face comparison search



Human Body Search



Motor Vehicle Search



Non-Vehicle Search



People Counting Report



General Search



Heat Map

U Series NVR(App: Guard Live/Elink-Video Surveillance)

H.265 4CH 12MP NVR YC-NVR3104



- Support 4CH IPC input
- Support 25/30fps@12MP/8MP/5MP/3MP/1080P recording
- Support 4CH simultaneous playback
- Support 4CH IPC audio input
- Support 4K HDMI and VGA output
- Support 1 SATA, Max 10TB/HDD
- Max Bandwidth: 80Mbps
- Support VCA AI Functions

H.265 8CH 12MP NVR YC-NVR3108



- Support 8CH IPC input
- Support 25/30fps@12MP/8MP/5MP/3MP/1080P recording
- Support 8CH simultaneous playback
- Support 8CH IPC audio input
- Support 4K HDMI and VGA output
- Support 1 SATA, Max 10TB/HDD
- Max Bandwidth: 80Mbps
- Support VCA AI Functions

H.265 16CH 12MP NVR YC-NVR3216-V2



- Support 16CH IPC input
- Support 25/30fps@12MP/8MP/5MP/3MP/1080P recording
- Support 16CH simultaneous playback
- Support 16CH IPC audio input, 1CH RCA in/out
- Support 4K HDMI and VGA output
- Support 2 SATA, Max 10TB/HDD
- Max Bandwidth: 160Mbps
- Support VCA AI Functions

H.265 32CH 12MP NVR YC-NVR3232



- Support 32CH IPC input
- Support 25/30fps@12MP/8MP/5MP/3MP/1080P recording
- Support 32CH simultaneous playback
- Support 32CH IPC audio input, 1CH RCA in/out
- Support 4K HDMI and VGA output
- Support 2 SATA, Max 10TB/HDD
- Max Bandwidth: 160Mbps
- Support VCA AI Functions

H.265 32CH 12MP NVR YC-NVR3432-V2



- Support 32CH IPC input
- Support 25/30fps@12MP/8MP/6MP/5MP/4MP/3MP/1080P recording
- Support 16CH simultaneous Playback
- Support 32CH IPC audio input, 1CH RCA in/out
- Support 2-CH 4K HDMI and 1-CH VGA output
- Support 4 SATA, Max 10TB/HDD
- Support Alarm 16CH in/4CH out
- Max Bandwidth: 384Mbps
- Support RAID: 0, 1, 5, 6, 10
- Support VCA AI Functions

H.265 32CH 12MP NVR YC-NVR3832-V2



- Support 32CH IPC input
- Support 25/30fps@12MP/8MP/6MP/5MP/4MP/3MP/1080P recording
- Support 16CH simultaneous Playback
- Support 32CH IPC audio input, 1CH RCA in/out
- Support 2-CH 4K HDMI and 1-CH VGA output
- Support 8 SATA, Max 10TB/HDD
- Support alarm 16CH in/4CH out
- Max bandwidth: 384Mbps
- Support RAID: 0, 1, 5, 6, 10
- Support VCA AI functions

H.265 64CH 12MP NVR YC-NVR3864-V2



- Support 64CH IPC input
- Support 25/30fps@12MP/8MP/6MP/5MP/4MP/3MP/1080P recording
- Support 16CH simultaneous Playback
- Support 64CH IPC audio input, 1CH RCA in/out
- Support 2-CH 4K HDMI and 1-CH VGA output
- Support 8 SATA, Max 10TB/HDD
- Support Alarm 16CH in/4CH out
- Max Bandwidth: 384Mbps
- Support RAID: 0, 1, 5, 6, 10
- Support VCA AI Functions

H.265 64CH 12MP NVR YC-NVR3864-V5



- Support 64CH IPC input
- Support 25/30fps@12MP/8MP/6MP/5MP/4MP/3MP/1080p recording
- Support 16CH simultaneous Playback
- Support 64CH IPC audio input, 1CH RCA in/out
- Support 4K HDMI and VGA output
- Support 8 SATA, Max 10TB/HDD
- Support Alarm 16CH in/4CH out
- Max Bandwidth: 320Mbps
- Support VCA AI Functions

H.265 32CH AcuSearch NVR YC-NVR3432-V3-IQ



AcuSearch

- Support 32CH IPC input
- Support 25/30fps@12MP/8MP/6MP/5MP/4MP/3MP/1080P recording
- Support 16CH simultaneous Playback
- Support 32CH IPC audio input, 1CH RCA in/out
- Support 1-CH 4K HDMI and 1-CH VGA output
- Support 4 SATA, Max 10TB/HDD
- Max bandwidth: 160Mbps
- SIP by NVR: 2-CH, UMD by NVR: 4-CH
- Support Face Snapshot Search; Face Comparison Search; Motor Vehicle Search; Non-Motor Vehicle Search; Human Body Search; General Search; People Counting Report; Heat Map

H.265 128CH 12MP NVR YC-NVR316-128R-V3



- Support 128CH IPC input
- Support 25/30fps@32MP/16MP/12MP/8MP/5MP/1080P recording
- Support 16CH simultaneous playback
- Support 128CH IPC audio input, 1CH BNC in/out
- Support 2-CH 4K (HDMI1: 8K, HDMI2: 4K), 2-CH VGA output
- Support 16 SATA, Max 10TB/HDD
- Support Alarm 24CH in/ 8CH out
- Max Bandwidth: 640Mbps
- Support VCA AI Functions
- Support RAID: 0, 1, 5, 6, 10, 50, 60

H.265 256CH 12MP NVR YC-NVR324-256-V3



- Support 256CH IPC input
- Support 25/30fps@32MP/16MP/12MP/8MP/5MP/1080P recording
- Support 16CH simultaneous playback
- Support 256CH IPC audio input, 1CH RCA in/out
- Support 2-CH 4K (HDMI1: 8K, HDMI2: 4K), 2-CH VGA output
- Support 24 SATA, Max 10TB/HDD
- Support Alarm 24CH in/ 8CH out
- Max Bandwidth: 640Mbps
- Support VCA AI Functions
- Support RAID: 0, 1, 5, 6, 10, 50, 60

H.265 64CH AcuSearch NVR NVR3864-V6-IQ



AcuSearch

- Support 64CH IPC input
- Support 25/30fps@12MP/8MP/6MP/5MP/4MP/3MP/1080p recording
- Support 16CH simultaneous Playback
- Support 64CH IPC audio input, Two-way audio: 1CH RCA in, 2CH RCA out
- Support 2-CH 4K HDMI and 2-CH VGA output
- Support 8 SATA, Max 16TB/HDD
- Support Alarm 16CH in/10CH out
- Max Bandwidth: 384Mbps
- SIP by NVR: 8CH, SMD by NVR: 16CH
- Support RAID 0, 1, 5, 6, 10
- Support Face Snapshot Search; Face Comparison Search; Motor Vehicle Search; Non-Motor Vehicle Search; Human Body Search; General Search; People Counting Report; Heat Map

U Series NVR/XVR(App: Guard Live/Elink-Video Surveillance)

H.265 4CH 4K POE NVR YC-NVR3104-P4-S3



- Support 4CH IPC input
- Support 4CH POE
- Support 25/30fps@8MP/6MP/5MP/4MP/3MP/1080P recording
- Support 4CH simultaneous playback
- Support 4CH IPC audio input
- Support 4K HDMI and VGA output
- Support 1 SATA, Max 10TB/HDD
- Max Bandwidth: 64Mbps

H.265 4CH 12MP POE NVR YC-NVR3104-P4



- Support 4CH IPC input
- Support 4CH POE
- Support 25/30fps@12MP/8MP/6MP/5MP/4MP/3MP/1080P recording
- Support 4CH simultaneous playback
- Support 4CH IPC audio input
- Support 4K HDMI and VGA output
- Support 1 SATA, Max 10TB/HDD
- Max Bandwidth: 80Mbps
- Support VCA AI Functions

H.265 8CH 4K POE NVR 8CH POE NVR&15.6"LCD Combo YC-NVR3108-P8-S3 NVR3108-P8-S3L



- Support 8CH IPC input
- Support 8CH POE
- Support 25/30fps@8MP/6MP/5MP/4MP/3MP/1080P recording
- Support 8CH simultaneous playback
- Support 8CH IPC audio input
- Support 4K HDMI and VGA output
- Support 1 SATA, Max 10TB/HDD
- Max Bandwidth: 64Mbps

H.265 8CH 12MP POE NVR YC-NVR3108-P8



- Support 8CH IPC input
- Support 8CH POE
- Support 25/30fps@12MP/8MP/6MP/5MP/4MP/3MP/1080P recording
- Support 8CH simultaneous playback
- Support 8CH IPC audio input
- Support 4K HDMI and VGA output
- Support 1 SATA, Max 10TB/HDD
- Max Bandwidth: 80Mbps
- Support VCA AI Functions

H.265 16CH 12MP POE NVR YC-NVR3216-P16-V2



- Support 16CH IPC input
- Support 16CH POE
- Support 25/30fps@12MP/8MP/6MP/5MP/4MP/3MP/1080P recording
- Support 16CH simultaneous playback
- Support 16CH IPC audio input, 1CH RCA in/out
- Support 4K HDMI and VGA output
- Support 2 SATA, Max 10TB/HDD
- Max Bandwidth: 160Mbps
- Support VCA AI Functions

H.265 16CH 4K POE NVR YC-NVR3432-P16-V2



- Support 32CH IPC input
- Support 16CH POE
- Support 25/30fps@12MP/8MP/6MP/5MP/4MP/3MP/1080P recording
- Support 16CH simultaneous playback
- Support 32CH IPC audio input, 1CH RCA in/out
- Support 4K HDMI and VGA output
- Support 4 SATA, Max 10TB/HDD
- Support Alarm 16CH in/4CH out
- Max Bandwidth: 160Mbps
- Support VCA AI Functions

H.265 4CH 5MP Lite 5 IN 1 XVR XVR3104-G3



- Support TVI/AHD/CVI/CVBS
- Support AHD TVI CVI 5MP@20fps, 4MP@30fps, 1080P@30fps, 720P@30fps
- Support 4CH Synchronous Playback
- Support HDMI×1, VGA×1, up to 1920*1080
- Support mainstream cameras of ONVIF and RTSP protocols
- Support 1CH RCA(channel 1), Audio over coaxial cable (only for TVI cameras)
- Support 1SATA up to 8TB

H.265 8CH 5MP Lite 5 IN 1 XVR XVR3108-G3



- Support TVI/AHD/CVI/CVBS
- Support AHD/TVI 5MP@12fps, 4MP@15fps; AHD/TVI/CVI 1080P@30fps, 720P@30fps
- Support 8CH Synchronous Playback
- Support HDMI×1, VGA×1, up to 1920*1080
- Support mainstream cameras of ONVIF and RTSP protocols
- Support 1CH RCA(channel 1), Audio over coaxial cable (only for TVI cameras)
- Support 1SATA up to 8TB

H.265 16CH 5MP Lite 5 IN 1 XVR XVR3116-G3



- Support TVI/AHD/CVI/CVBS
- Support AHD/TVI 5MP@12fps, 4MP@15fps; AHD/TVI/CVI 1080P@30fps, 720P@30fps
- Support 16CH Synchronous Playback
- Support HDMI×1, VGA×1, up to 1920*1080
- Support mainstream cameras of ONVIF and RTSP protocols
- Support 1CH RCA(channel 1), Audio over coaxial cable (only for TVI cameras)
- Support 1SATA up to 8TB

H.265 4CH 8MP Lite 5 IN 1 XVR XVR3104-Q3



- Support TVI/AHD/CVI/CVBS:
- Support AHD TVI CVI: 8MP@15fps, 5MP@20fps(AHD/TVI)/25fps(CVI), 4MP@30fps, 1080P@30fps, 720P@30fps
- Support 4CH synchronous playback
- Support HDMI×1, VGA×1, CVBS×1, up to 4K(3840×2160)
- Support mainstream cameras of ONVIF and RTSP protocols
- Support 1CH RCA(channel 1), Audio over coaxial cable(only for TVI cameras)
- Support 1SATA up to 8TB

H.265 8CH 8MP Lite 5 IN 1 XVR XVR3108-Q3



- Support TVI/AHD/CVI/CVBS:
- Support AHD TVI CVI: 8MP@15fps, 5MP@20fps(AHD/TVI)/25fps(CVI), 4MP@30fps, 1080P@30fps, 720P@30fps
- Support 8CH synchronous playback
- Support HDMI×1, VGA×1, CVBS×1, up to 4K(3840×2160)
- Support mainstream cameras of ONVIF and RTSP protocols
- Support 1CH RCA(channel 1), Audio over coaxial cable(only for TVI cameras)
- Support 1SATA up to 8TB

H.265 16CH 8MP Lite 5 IN 1 XVR XVR3216-Q3



- Support TVI/AHD/CVI/CVBS:
- Support AHD TVI CVI: 8MP@15fps, 5MP@20fps(AHD/TVI)/25fps(CVI), 4MP@30fps, 1080P@30fps, 720P@30fps
- Support 16CH synchronous playback
- Support HDMI×1, VGA×1, CVBS×1, up to 4K(3840×2160)
- Support mainstream cameras of ONVIF and RTSP protocols
- Support 1CH RCA(channel 1), Audio over coaxial cable(only for TVI cameras)
- Support 2SATA each up to 8TB

T Series NVR (APP: SuperLive Plus)

H.265 4CH 8MP NVR NVR6104-V5



- 25/30fps@8MP/6MP/5MP/4MP/3MP/1080P IPC input and recording
- Support 4CH simultaneous playback
- Support 4CH IPC audio input, HDMI support audio output
- Support Two-way Audio
- Support VGA and HDMI (1080P) output
- Support 1 SATA, Max 10TB/HDD
- Max Bandwidth: 80Mbps
- Face detection: 2CH

H.265 8CH 8MP NVR NVR6108-V5



- 25/30fps@8MP/6MP/5MP/4MP/3MP/1080P IPC input and recording
- Support 8CH simultaneous playback
- Support 8CH IPC audio input, HDMI support audio output
- Support Two-way Audio
- Support VGA and HDMI (1080P) output
- Support 1 SATA, Max 10TB/HDD
- Max Bandwidth: 80Mbps
- Face detection: 2CH

H.265 16CH 4K NVR NVR6216-V5



- Support 16CH 25/30fps@4K/5MP/4MP/3MP/1080P IPC input and recording
- Support 16CH simultaneous playback
- Support 16CH IPC audio input, HDMI support audio output
- Support Two-way Audio
- Support VGA and HDMI (4K) output
- Support 4CH Alarm input/1CH Alarm output
- Support 2 SATA, Max 10TB/HDD
- Max Bandwidth: 160Mbps
- Face detection: 2CH

H.265 32CH 12MP NVR NVR6232G-V5



- Support 32CH 25/30fps@4K/6MP/5MP/4MP/3MP/1080P IPC video input
- Support 16CH simultaneous Playback
- Support 32CH IPC audio input, HDMI Support audio output
- Support Two-way Audio
- Support VGA and HDMI 1 (4K) and HDMI2 (1080P) output
- Support 2 SATA, Max10TB/HDD
- Max Bandwidth: 320Mbps
- Face detection: 2CH

H.265 4CH POE 4K NVR YC-NVR6104-P4-V5



- Support 4CH 25/30fps@8MP/6MP/5MP/4MP/3MP/1080P/DI/CIF IP video input
- Support 4CH POE
- Support 4CH simultaneous Playback
- Support 4CH IPC audio input, HDMI support audio output
- Support Two-way Audio
- Support VGA and HDMI (4K) output
- Support 1 SATA, Max 10TB/HDD
- Max Bandwidth: 80Mbps
- Face detection: 2CH

H.265 8CH POE 4K NVR YC-NVR6108-P8-V5



- Support 8CH 25/30fps@8MP/6MP/5MP/4MP/3MP/1080P/D1/CIF IP video input
- Support 8CH POE
- Support 8CH simultaneous Playback
- Support 8CH IPC audio input, HDMI support audio output
- Support Two-way Audio
- Support VGA and HDMI (4K) output
- Support 1 SATA, Max 10TB/HDD
- Max Bandwidth: 80Mbps
- Face detection: 2CH

H.265 64CH 12MP NVR NVR6864G



- Support 64CH 20fps@12MP/25/30fps@4K/5MP/4MP/3MP/1080P IPC Input and recording
- Support 16CH simultaneous playback
- Support 64ch IPC audio input
- Support Two-way Audio (RCA × 1)
- Support VGA and HDMI (4K) output
- Support 16CH Alarm input/4CH Alarm output
- Supports RAID 0, 1, 5, 6, 10
- Support 8 SATA, MAX 10TB/HDD
- Max bandwidth: 320Mbps
- Face detection: 2CH

H.265 16CH POE 4K NVR YC-NVR6216-P16-V5



- Support 16CH 25/30fps@8MP/6MP/5MP/4MP/3MP/1080P IP video input
- Support 16CH POE
- Support 16CH simultaneous Playback
- Support 16CH IPC audio input, HDMI support audio output
- Support Two-way Audio
- Support VGA and HDMI (4K) output
- Support 2 SATA, Max10TB/HDD
- Max Bandwidth: 160Mbps
- Face detection: 2CH

H.265 32CH POE 12MP NVR NVR6432-P16-A2



- Support 32CH 12MP/8MP/6MP/5MP/4MP/3MP/1080P/D1/CIF IPC Input
- Support 16CH POE
- Support 16CH simultaneous playback
- Support 32CH IPC audio input, HDMI support audio output
- Support Two-way Audio
- Support VGA, HDMI1 (4K), HDMI2 (1080P) output
- Support 16CH Alarm Input/4CH Alarm output
- Support 4 SATA, Max 10TB/HDD
- Max Bandwidth: 192Mbps
- Face detection: 2CH
- Face comparison

H.265 4CH/8CH 5MP 5 in 1 XVR YC-XVR5104-V4
YC-XVR5108-V4



- Support 4CH/8CH TVICVI/AHD/CVBS/IP Hybrid input
- Support 5MP Lite@10fps, 4MP Lite: 12fps (PAL)/15fps (NTSC) 1080P@15fps, 1080P Lite/720P@30fps recording
- Support 4CH/8CH local playback
- Support HDMI VGA/CVBS output
- Support 1CH Audio in/Out
- Support 1 SATA, Max 8TB/HDD

H.265 4CH/8CH 8MP 5 in 1 XVR YC-XVR6104-V4
YC-XVR6108-V4



- Support 4CH/8CH TVI/CVI/AHD/CVBS/IP Hybrid input
- Support 4K@8fps, 4K Lite@12fps(PAL)/15fps(NTSC), 5MP@12fps, 5MP Lite@20fps, 4MP/3MP@12fps(PAL)/15fps(NTSC)
- 4MP Lite/1080P/720P@30fps recording
- Support 4CH/8CH local playback
- Support HDMI VGA/CVBS output
- Support 1CH Audio In/Out
- Support 1 SATA, Max 8TB/HDD

H.265 16CH 5MP 5 in 1 XVR YC-XVR5116-V4



- Support 16CHTVI/CVI/AHD/CVBS/IP Hybrid input
- Support 5MP Lite@10fps, 4MP Lite/1080P: 12fps(PAL)/15fps(NTSC), 1080P Lite/720P@30fps recording
- Support 16CH local playback
- Support HDMI VGA/CVBS output
- Support 1CH Audio In/Out
- Support 1 SATA, Max 8TB/HDD

H.265 16CH 4K 5 in 1 XVR YC-XVR6216-V3



- Support 16CH TVI/CVI/AHD/CVBS/IP Hybrid input
- Support 4K@8fps (PAL/NTSC), 4K Lite@12fps/15fps (PAL/NTSC) 5MP@12fps (PAL / NTSC), 5MP Lite@20fps (PAL / NTSC) 4MP@12fps (PAL) /15fps (NTSC) 4MP Lite/1080P/720P/WD1@25fps (PAL) /30fps (NTSC)
- Support 16CH local playback
- Support HDMI (4K) /VGA/CVBS output
- Support 8CH Audio In/1CH Out
- Support 16CH Alarm in/4CH Out
- Support 2 SATA, Max 10TB/HDD

H.265 32CH 4K 5 in 1 XVR YC-XVR6832-V3



- Support 32CH TVI/CVI/AHD/CVBS/IP Hybrid input
- TVI/AHD/CVI: 4K@ 15fps; 5MP@20fps; 4MP/3MP/ 1080P/720P/WD1@25fps/30fps (live)
- Multi-type recording: manual / timed / sensor / motion /AI recording Search: time slice, time, event, tag and smart search
- Supports PTZ preset and auto cruise, up to 255 presets and 8 cruises
- Supports RAID 0, 1, 5, 6, 10
- Support 16CH local playback
- Support HDMI (4K) /VGA/CVBS output
- Support 16CH Audio In/1CH Out
- Support 16CH Alarm in/8CH Out
- Support 8 SATA, Max 10TB/HDD

10/100M POE Switch YC-HRSW0402



- 4*10/100M POE Switch
- + 2 Uplink Ethernet ports
- AF/AT Standard, Each port 15.4W/30W
- Support VLAN Mode and Extend 250meters
- Support Watchdog function
- Port Lightning Protection: General Mode 4KV
- Differential Mode 1KV ESD 8KV
- 200*118*45mm (L/W/H)
- Internal Power Supply 52V 1.25A

10/100M POE Switch YC-HRSW08G02



- 8*10/100M POE Switch
- +2 Uplink Gigabit Ethernet ports
- AF/AT Standard, Each port 15.4W/30W
- SupportVLAN Mode and Extend 250meters
- Support Watchdog function
- Port Lightning Protection: General Mode 4Kv
- Differential Mode 2KV ESD 8KV
- 220*120*45mm (L/W/H)
- Internal Power Supply 52V 2.3A

10/100M POE Switch YC-HRSW1602-300



- 16*10/100M POE ports
- +2 Uplink Gigabit Ethernet ports
- +1 Uplink Gigabit SFP port
- AF/AT Standard, Each port 15.4W/30W,
- Support VLAN Mode and Extend 250mtrs
- 320*210*45mm (L/W/H)
- Internal Power Supply 52V 5.76A

10/100M POE Switch YC-HRSW2402-300



- 24*10/100M POE ports
- +2 Uplink Gigabit Ethernet port
- +1 Uplink Gigabit SFP port
- AF/AT Standard, Each port 15.4W/30W,
- 320*210*45mm (L/W/H)
- Internal Power Supply 52V 5.76A

10/100/1000Mbps POE Switch YC-HRSW1604G-300



- 16*10/100/1000M POE Ports
- with 2 Gigabit Ethernet port + 2* SFP ports
- Support VLAN Mode, extend
- AF/AT Standard, Each port 15.4W/30W
- 440*205*44mm (L*W*H)
- Internal Power Supply 52V 3.8A 200W/52V 5.76A 300W

10/100/1000Mbps POE Switch YC-HRSW2402G-300



- 24*10/100/1000M POE Ports
- with 2 Gigabit Ethernet port + 2* SFP ports
- Support VLAN Mode, extend
- AF/AT Standard, Each port 15.4W/30W
- 445*285*45mm(L*W*H)
- Internal Power Supply 52V 5.76A 300W/52V 7.69A 400W

10/100/1000Mbps Managed PoE Switch YC-HRSW1604G-200-GM
YC-HRSW1604G-300-GM



- L2 Managed
- 16*10/100/1000M POE ports, with 2 Gigabit Ethernet port + 2* SFP ports
- AF/AT Standard, Each port 15.4W/30W
- Support Web management, POE management, Ring-Network
- 440*205*44mm (L*W*H)
- Port Lightning Protection: General Mode 6KV
- Differential Mode 2KV, ESD 15KV

10/100/1000Mbps Managed PoE Switch YC-HRSW2404G-300
YC-HRSW2404G-400



- L2 Managed
- 24*10/100/1000M POE Ports, with 4 Gigabit Ethernet port + 4* SFP ports
- AF/AT Standard, each port 15.4W/30W
- Support Web management, POE management, Ring-Network
- 440*280*44mm (L*W*H)
- Port Lightning Protection: General Mode 6KV
- Differential Mode 2KV, ESD 15KV

Seagate/Western Digital/Toshiba Hard Drive



- 2TB/3TB/4TB/6TB/8TB/10TB available

Junction Box & Bracket

DP01  HZ56E HZ57E HZ86 BB94C 30PTZ	DP02  BB95D BB95E BB56 5X-HS PTZ	DP03  HZ37E/HZ49E HZ56E/HZ56F HZ57E/HZ57F HZ86	DPZ58  ADZ58	DP-78  HBB78	DP-54  HBB54	DP-94B  BB94B	DP-98  BB98E	DP-97  BB97	DP99F  BB99F B99GA	DP-08 Waterproof  BB59/BB97/BB78/BB99 HZ37E/HZ49E/HZ37Y HZ56E/HZ56F BB95D/BB95E HZ86/30PTZ HZ57E/HZ57F
B54  BB54 BB56 BB95D BB95E 5X-HS PTZ	B59  BB59 BB97	B78  HBB78	B3X  B3X	B97  HBB97	B99F  BB99F					